



ARIENS®



2026

ARIENS ZERO-TURN MOWER 2026 EN-INT

Valid from 01.10.2025, V1 [www.ariens.eu](http://www.ariens.eu)

**NEW!****20****SUMMIT PRO SERIES**

All our experience in one machine for daily, professional and municipal use. Maximum performance, durability and comfort. You can rely on it. Every day.

**30****ZENITH E SERIES**

Do you have a lot of mowing to do? Then you need a reliable machine that prioritises driving comfort. This machine combines professional components with optimum seating comfort and spring-loaded wheel forks.

**38****IKON SERIES**

The IKON is designed for gardens of all sizes. It impresses private users and caretaker services alike with its comfort, cutting finish and quality.

**48****ARROW SERIES ARROW E**

'Stand-on' mowers are all the rage. They are comfortable and fast, yet particularly compact, agile and space-saving. Your back and muscles will thank you for the upright working position.

**26****ZENITH E SERIES**

Installing batteries in a mower is one thing. Achieving the performance, durability and reliability of a proven professional petrol model is another. Our models with the FusionCore replaceable battery system meet this demand. Try it out for yourself!

**34****APEX SERIES**

Made for service providers who mow frequently. Top components in the engine, drive and cutter deck combined with an excellent price-performance ratio.

**42****EDGE SERIES**

Enjoy the benefits of a zero-turn mower in your garden. Mow more manoeuvrably and comfortably than with any lawn tractor and have fun doing it. Made for small to medium-sized gardens with narrow passages.

**ARIENS****CONTENTS**

|                                |    |
|--------------------------------|----|
| <b>WELCOME TO ARIENSCO</b>     | 4  |
| <b>WHY CHOOSE A ZERO-TURN?</b> | 6  |
| <b>ARIENS FUSIONCORE</b>       | 12 |
| <b>ZERO-TURN OVERVIEW</b>      | 16 |

|                          |    |
|--------------------------|----|
| <b>ZERO-TURN MOWERS</b>  | 18 |
| <b>SUMMIT PRO SERIES</b> | 20 |
| <b>ZENITH E SERIES</b>   | 26 |
| <b>ZENITH SERIES</b>     | 30 |
| <b>APEX SERIES</b>       | 34 |
| <b>IKON SERIES</b>       | 38 |
| <b>EDGE SERIES</b>       | 42 |

|                                  |    |
|----------------------------------|----|
| <b>STAND-ON ZERO-TURN MOWERS</b> | 46 |
| <b>ARROW E SERIES</b>            | 48 |
| <b>ARROW SERIES</b>              | 52 |

|                      |    |
|----------------------|----|
| <b>ACCESSORIES</b>   |    |
| <b>COMPATIBILITY</b> | 56 |
| <b>ZENITH E</b>      | 58 |
| <b>ZERO-TURNS</b>    | 60 |

|                          |    |
|--------------------------|----|
| <b>SPECIFICATIONS</b>    |    |
| <b>ZENITH E SERIES</b>   | 62 |
| <b>ARROW E SERIES</b>    | 63 |
| <b>SUMMIT PRO SERIES</b> | 64 |
| <b>ZENITH SERIES</b>     | 64 |
| <b>ARROW SERIES</b>      | 65 |
| <b>APEX SERIES</b>       | 66 |
| <b>IKON SERIES</b>       | 67 |
| <b>EDGE SERIES</b>       | 67 |

# TWO STRONG BRANDS UNDER ONE ROOF

More information about AriensCo at [www.ariensco.com](http://www.ariensco.com)

## MARKET LEADER IN BRUSHCUTTERS

At our production site in Bühlertann, Germany, we develop and produce specialised solutions for garden and landscape maintenance under the AS-Motor brand. Our machines are made for extreme requirements – especially for cutting high grass on steep slopes or in rough terrain. An AS-Motor brushcutter could be the solution to your mowing problem.

Further information at  
[www.as-motor.com](http://www.as-motor.com)



AriensCo is a family-run multi-brand company in its 5th generation. AriensCo offers an extensive product range with its two product brands AS-Motor and Ariens, from walk-behind mowers to zero-turn mowers and remote-controlled high grass mowers.

## PROFESSIONAL IN LAWN CARE AND WINTER MAINTENANCE

Our Ariens brand products are manufactured at our production site in Brillion, Wisconsin. As one of the leading brands in this segment, Ariens offers professionals and private customers the best solution and the widest range in the area of lawn care and snow clearing. The brand's portfolio includes zero-turn mowers and two-stage snow blowers in particular.

Further information at  
[www.ariens.eu](http://www.ariens.eu)





# WHY CHOOSE A ZERO-TURN MOWER?

In recent years, the typical lawn tractor with a steering wheel has been replaced by the zero-turn mower, especially in the USA – in private gardens as well as among professional users. For some years now, this trend has also been reflected in Europe. More and more users are becoming aware of the many advantages of a zero-turn mower.

# ADVANTAGES OF A ZERO-TURN



## MOW FASTER

- Turn on the spot
- Seamless continuation from the last cutting pass
- Precise driving around obstacles
- Effective mowing saves time and fuel



## MORE COMFORT

- Greater legroom
- Comfortable, adjustable seats
- Smooth operating features



## LONG LIFE

- High quality steel frames and cutter decks
- Robust hydrostatic transmissions
- Premium quality engines



## ENJOYABLE

- Mowing fun – through the combination of speed, manoeuvrability and comfort
- Gain more time for other activities
- No cuttings to dispose of

## HOW MUCH FASTER IS A ZERO-TURN MOWER COMPARED TO A LAWN TRACTOR?

| PRACTICAL TRIAL                  | SELF-PROPELLED WALK-BEHIND LAWN MOWER, 55CM SIDE DISCHARGE | LAWN TRACTOR, 106 CM SIDE DISCHARGE | ZERO-TURN, 106 CM SIDE DISCHARGE |
|----------------------------------|--|-------------------------------------|----------------------------------|
| Mowing time (minutes)            | 201  | 90                                  | 55                               |
| Additional rework time (minutes) | 0  | 20                                  | 15                               |

The zero-turn mower with the same cutting width is **40% FASTER** than a lawn tractor

Practical example with side discharge mowers from [www.todaysmower.com](http://www.todaysmower.com)  
(estimated 4,000m<sup>2</sup>, flat terrain, ornamental lawn, 40 trees, some additional obstacles)

## WHY IS A ZERO-TURN SO FAST?

### More time for other things.

In contrast to classic lawn tractors with a steering wheel, zero-turn mowers are driven by two independent wheel motors driving each of the rear wheels. Each wheel is individually controlled with one of two steering levers.

### The drive wheels can thus move in the same or different directions.

In practice, this means that you can turn on the spot in one single manoeuvre, unlike a lawn tractor that requires a large turning circle or manoeuvring backwards and forwards. This also means there is less uncut grass in the turning area and obstacles can easily be navigated.


### Its precision significantly reduces annoying "cleaning out" at the end.

Due to their low centre of gravity and 'high-volume' cutter decks, zero-turn mowers achieve higher mowing speeds than lawn tractors. For users who have switched to a zero-turn, the conventional lawn tractor with a steering wheel has had its day.

## CAN ANYONE DRIVE A ZERO-TURN?

### Zero-turn driving is very easy.

In the beginning, it just needs a little practice. **The shopping trolley comparison is the easiest way to understand.** Depending on the manoeuvre, move the levers as follows:

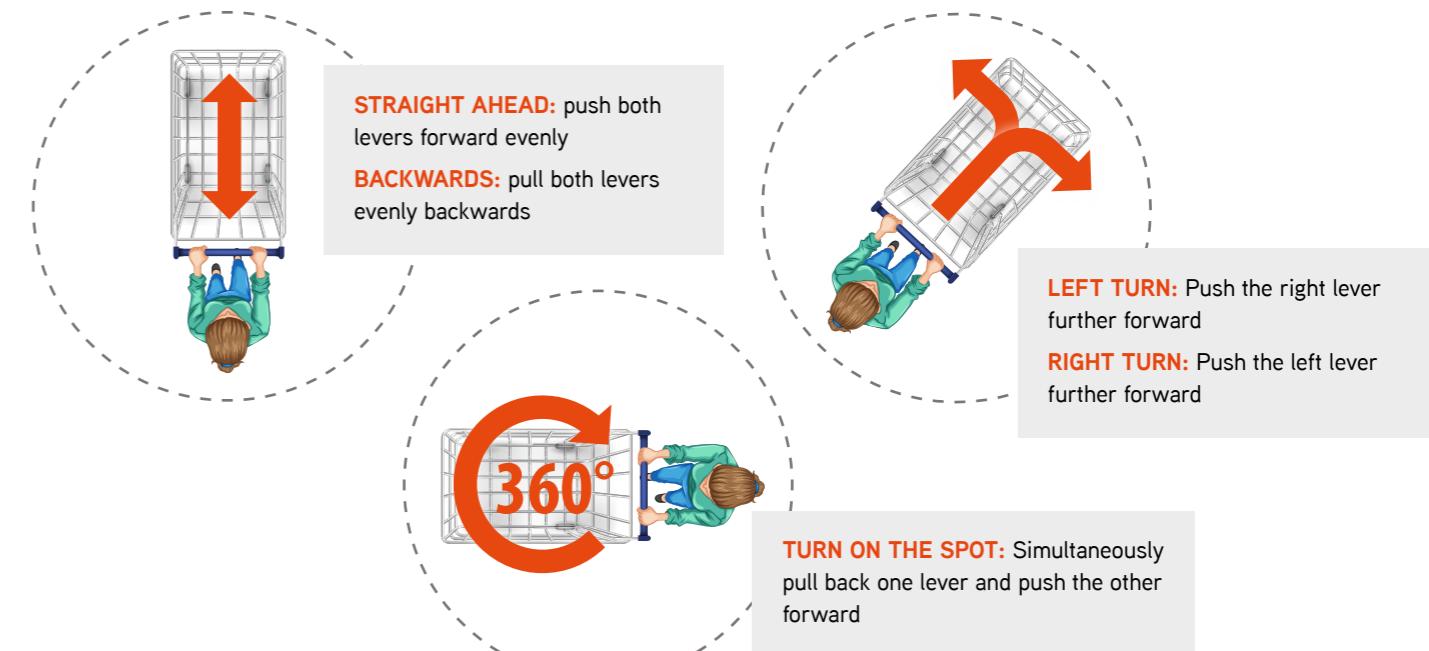

## BEAUTIFUL LAWNS WITHOUT COLLECTING

Ariens zero-turn mowers all mow without a collection bag. There is a simple but good reason for this. With a collection bag, the biggest advantage of a zero-turn mower is nullified – its speed. However, a bag is not necessary to keep lawns looking good. Depending on the area, you can choose between side discharge, side discharge with mulch kit or rear discharge. A clean cut is always the result.


## WHICH CUTTER DECK IS RIGHT FOR ME?

All Ariens zero-turn mowers are available with side discharge cutter decks in which can be fitted an optional mulching kit. For the ZENITH E, ZENITH, APEX and ARROW E models, rear discharge cutter decks without a mulching kit option are also available.

## REAR DISCHARGE:

A rear discharge cutter deck is a robust deck for every day use.

- Strong airflow cuts even thin and well-trodden lawns
- Distributes clippings the full width of the cutter deck
- Very good visual result with fine to medium grass thickness
- Copes well with overgrown lawns without clogging up
- Allows high to highest mowing speed
- All-round edge protection of the cutter deck
- Obstacles can be mowed close to the edge on both sides

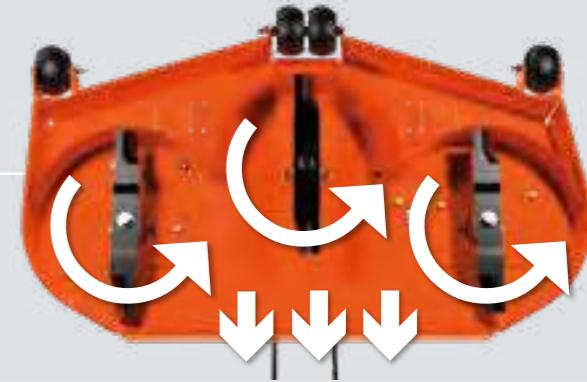

## SIDE DISCHARGE:

A side discharge cutter deck gives you flexibility as an optional mulching kit can be fitted.


- Very strong airflow cuts even fine grass and well-trodden lawns perfectly
- Distributes the clippings over a large area
- Very good visual result
- Copes very well with overgrown lawns without clogging up
- Enables highest mowing speed
- Cuttings are ejected to the side
- A mulching kit can be fitted to all side discharge cutter decks. This then closes the side discharge and the deflector can be removed



## MULCH KIT:

A mulching kit provides a very even cutting pattern on low to medium height turf. It can be optionally fitted to all side discharge cutter decks.

- With a built-in mulching kit, clippings are kept in the cutter deck longer
- The special mulching blades (included in the mulching kit) have two cutting edges at different heights
- The clippings are chopped finer and evenly distributed into the lawn, over the full width of the cutter deck
- A visually appealing cutting pattern is created
- Obstacles can then be mown close to the edge on both sides

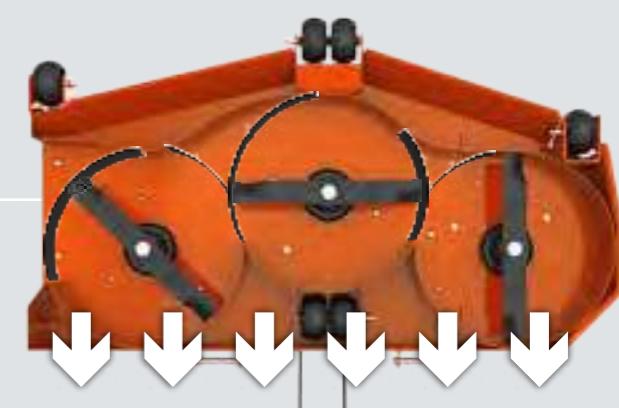

## ADVANTAGES OF MULCHING:

- Clippings disappear almost invisibly into the lawn
- Protects the lawn from drying out
- Keeps moisture and fertiliser in the lawn
- Reduces the need for fertiliser by 30%

# PROFESSIONAL BATTERY ZERO-TURN MOWER

**AS POWERFUL AS A PETROL ENGINE BUT  
QUIETER AND WITH LESS EMISSIONS**

The ZENITH E and ARROW E are fully professional, battery-powered zero-turn mowers designed specifically for professional users. Their power comes from the Ariens FusionCore swappable battery system, which gives you the capability to mow all day\*. When batteries run out, just swap them in seconds and continue working. The Ariens FusionCore battery system is currently the only commercial system on the market with swappable batteries.

For the professional user, working in urban, populated areas brings special requirements that are now difficult to manage with conventional combustion machines. Customer sensitivity to excessive noise and carbon emissions can limit the use of petrol or diesel engine mowers near schools, offices, hospitals and inner city parks.

Ariens FusionCore mowers are one of the first fully professional, battery-powered zero-turn mowers that overcome these issues without compromising on performance or productivity. Based on the best-selling ZENITH platform, the ZENITH E offers the same outstanding features, but with the most advanced battery technology, making it the industry leader in interchangeable battery zero-turn mowers for four years now.

\* Depending upon operational hours, operator usage and cutting conditions



The FusionCore system is a proprietary development by Ariens. It offers above-average performance in all components – in the wheel drive, in the blade motors and in the cutting quality.



The only commercial swappable battery system on the market allows you to mow non-stop. It allows unrivalled flexibility and compatibility between the Ariens ZENITH E, ARROW E and the new highgrass-mower AS 920 E-Sherpa 2WD from AS-Motor.



More information:  
[www.as-motor.com](http://www.as-motor.com)



Maximum range with one battery charge:\*

Six football pitches in 4.5 hours. (ZENITH E, 52" side discharge, ECO mode)

\*Range varies depending on cutter deck, driving lever position, obstacles, temperature and clippings.



The ZENITH E is more economical in operation and maintenance compared to the combustion model ZENITH, even with less than 100 hours of use per year.

More information:  
[www.ariens.eu](http://www.ariens.eu)



Even after 1000 full charge cycles, the FusionCore battery remains powerful. We offer a voluntary manufacturer's warranty of 3 years on the battery packs.

# FUSIONCORE™ TECHNOLOGY

Having decided to develop professional battery zero-turn mowers, Ariens had very clear objectives from the beginning:

- **Same cutting quality as a petrol model**
- **Smooth and powerful drive similar to hydrostatic transmissions**
- **Same service life and warranty as a combustion engine model**

The combination of components is what sets FusionCore apart from other systems on the market. The FusionCore system is exclusive to Ariens machines.

## BATTERY CAPACITY:

Four individual battery packs at  
4 kWh = 16 kWh.

**3** YEAR  
BATTERY  
WARRANTY



**AS**  
MOTOR



## INTERCHANGEABLE BATTERIES

Change depleted batteries in seconds. Mow with only two batteries and drive with one. Batteries are compatible between the ZENITH E, the ARROW E and the new highgrass-mower AS 920 E-Sherpa 2WD from AS-Motor.

**QUICKSWAP**  
INTERCHANGEABLE POWER SYSTEM



## CHARGING SYSTEM:

Standard or fast charging options. On-board in the machine or externally, in the mobile charging station.

**Charging time 0-100%:**

**Normal:** 12 hours

**Fast:** 5.3 hours



## ELECTRIC WHEEL DRIVE:

Transaxles are driven by 5 kW brushless motors coupled with a planetary gearbox that increases torque.



POWERED BY  
**FUSIONCORE**



## LED DISPLAY:

Colour LED display for information, diagnosis and service. Two USB charging sockets.



## ELECTRIC SPINDLE MOTORS:

Three high-performance brushless motors. Motor protection through slipping clutch. Replaceable shaft and lower bearing. Maximum power 3.5 kW per blade. Sufficient power to even mow overgrown and dense lawn.

# ZERO-TURNS

# EXPERIENCE MAKES

# THE DIFFERENCE

Since 2005, zero-turn mowers have conquered the lawn tractor market in the USA. Currently, this trend is also repeating itself in Europe. Ariens is one of the largest zero-turn manufacturers on the market. Hundreds of thousands of customers around the world trust our quality. Take advantage of our experience. You are guaranteed to find the right model for you.



**NEW!**

## SUMMIT PRO

Page 20

### USER: PROFESSIONAL

The ARIENS SUMMIT PRO series is Ariens' most successful fleet machine. Professional service providers worldwide rely on the reliability of the ARIENS SUMMIT PRO series. Mowing performances of 500 to 1,000 hours per season are not uncommon. No matter which model you choose, every ARIENS SUMMIT PRO will make a mark on your fleet and your entire team will not want to be without it. Guaranteed!

### SUMMIT PRO 500:

**5** YEAR\* NO HOUR LIMIT FOR FIRST TWO YEARS  
OR 1500 HOURS WARRANTY\*



## ZENITH E

Page 26

### USER: PROFESSIONAL

The ZENITH E is a professional battery zero-turn mower for daily use. Its four high-capacity interchangeable batteries provide full power and long range and can be changed in seconds when needed. Choose from nine cutter deck configurations to suit you.



## ZENITH

Page 30

### USER: PROFESSIONAL

The ZENITH has been the flagship of Ariens for years. All our experience has gone into it. Strong and durable, equipped with premium components and unparalleled suspension comfort. It offers everything the professional user needs.



## APEX

Page 34

### USER: PROFESSIONAL

Service providers and private users with large grounds rely on its high performance, comfort and robust professional components. Its price-performance ratio in the professional segment is unmatched. Choose from six cutter deck configurations to find the right one for you.



## IKON

Page 38

### USER: PROFESSIONAL/ RESIDENTIAL

The IKON sets standards in the class for private users and smaller service providers. Its mowing speed is impressive and turns tedious lawn mowing into fun. It offers exceptional comfort and has a rock-solid design. We believe it is currently the best mower in its class. Guaranteed.



## EDGE

Page 42

### USER: RESIDENTIAL

The EDGE is made for small to medium-sized gardens. With its mowing widths of 86 and 107 cm, it can also be used in tighter spaces. Its manoeuvrability and comfort take mowing to a new level of fun. A robust frame, maintenance-free wheel-drive and powerful engine will serve you reliably for years.



## ARROW E

Page 48

### USER: PROFESSIONAL

The ARROW E is a professional battery stand-on zero-turn mower for daily use. Its components are all professional, from the hydrostat to the engine and the 4.5 mm thick cutter deck. With its compact design and mowing widths of 81 and 91 cm, it is the most manoeuvrable of all zero-turn mowers. The right choice for when space is tight between obstacles, flowerbeds and on a trailer.



## ARROW

Page 52

### USER: PROFESSIONAL

The ARROW is a "stand-on" zero-turn mower for everyday use. Its components are all professional, from the hydrostat to the engine and the 4.5 mm thick cutter deck. With its compact design and mowing widths of 81 and 91 cm, it is the most manoeuvrable of all zero-turn mowers. The right choice for when space is tight between obstacles, flowerbeds and on a trailer.

### SUMMIT PRO 300:

**5** YEAR\* NO HOUR LIMIT FOR FIRST TWO YEARS  
OR 1250 HOURS WARRANTY\*

**5** YEAR\* NO HOUR LIMIT FOR FIRST TWO YEARS  
OR 1500 HOURS WARRANTY\*

**4** YEAR\* 750 HOURS WARRANTY

**4** YEAR\* 500 HOURS WARRANTY

**3** YEAR\* 300 HOURS WARRANTY

**2** YEAR\* 150 HOURS WARRANTY

**5** YEAR\* NO HOUR LIMIT FOR FIRST TWO YEARS  
OR 1500 HOURS WARRANTY\*

**5** YEAR\* NO HOUR LIMIT FOR FIRST TWO YEARS  
OR 1000 HOURS WARRANTY\*

POWERFUL AND COMFORTABLE

# RIDE-ON ZERO-TURN MOWERS



Zero-turn mowers are not just for large lawns. We offer the full range. From the compact EDGE for residential gardens to the new SUMMIT PRO for service providers and local authorities.

**NEW!**

# SUMMIT PRO SERIES

**SUMMIT PRO 500:**

**5 YEAR** OR 1500 HOURS **WARRANTY\*** NO HOUR LIMIT FOR FIRST TWO YEARS

Powered by  
**Kawasaki**



**SUMMIT PRO 300:**  
**5 YEAR** OR 1250 HOURS **WARRANTY\*** NO HOUR LIMIT FOR FIRST TWO YEARS

Illustration shows accessories

**MODEL OVERVIEW**

|                            | <b>SUMMIT PRO 348</b>                  | <b>SUMMIT PRO 352</b>                  | <b>SUMMIT PRO 360</b>                  | <b>SUMMIT PRO 560</b>                     | <b>SUMMIT PRO 572</b>                     |
|----------------------------|--|--|--|---|---|
| MODEL                      | 992331                                 | 992333                                 | 992332                                 | 992334                                    | 992335                                    |
| ENGINE                     | Kawasaki® FX801V 852 cm <sup>3</sup>   | Kawasaki® FX801V 852 cm <sup>3</sup>   | Kawasaki® FX801V 852 cm <sup>3</sup>   | Kawasaki® FX850V 852 cm <sup>3</sup>      | Kawasaki® FX850V 852 cm <sup>3</sup>      |
| CUTTING WIDTH              | 122 cm (48")                           | 132 cm (52")                           | 152 cm (60")                           | 152 cm (60")                              | 183 cm (72")                              |
| DECK TYPE                  | Side discharge                         | Side discharge                         | Side discharge                         | Side discharge                            | Side discharge                            |
| MULCH KIT (OPTIONAL)       | Yes                                    | Yes                                    | Yes                                    | Yes                                       | Yes                                       |
| SEAT SUSPENSION            | Mechanical, adjustable                 | Mechanical, adjustable                 | Mechanical, adjustable                 | Air Ride, pneumatic, adjustable           | Air Ride, pneumatic, adjustable           |
| MAX GROUND SPEED (FWD/REV) | 14.5 km/h / 5.3 km/h (9 mph / 3.3 mph) | 14.5 km/h / 5.3 km/h (9 mph / 3.3 mph) | 14.5 km/h / 5.3 km/h (9 mph / 3.3 mph) | 21.3 km/h / 8.4 km/h (13.2 mph / 5.2 mph) | 21.3 km/h / 8.4 km/h (13.2 mph / 5.2 mph) |

Accessories overview: page 56 / 57, specifications: page 64

**THE PINNACLE OF ZERO-TURN PERFORMANCE.**

For us, "HEAVY-DUTY" is the ultimate in stability and robustness. Maximum durability, a flawless cut, and exceptional driving comfort come together in the new ARIENS SUMMIT PRO Series. The choice is yours – but no matter which model you select, every ARIENS SUMMIT PRO will elevate your fleet. Your team won't want to work without it. Guaranteed.



# FEATURES & BENEFITS

## SUMMIT PRO SERIES

### NEW ARIENS ENVY-PRO MOWER DECK

The deck has been completely redesigned for the best possible grass distribution and cut quality. It is welded from 4.6 mm thick sheet steel and offers the robustness for years of use. With its great depth, it is perfectly suited for the installation of the optional mulch kit.



### PREMIUM KAWASAKI® FX ENGINES

Kawasaki engines are renowned for their legendary durability and performance. Paired with the exceptional design of the ARIENS SUMMIT PRO models, they deliver unmatched power and long-lasting reliability. 852 cm<sup>3</sup> displacement, V-twin, double air filter, high-performance oil cooler, electronic ignition, internally ventilated twin carburettor, metal housing, oil drain hose and cleaning openings deliver full power at all times. Oil change every 100 hours.



### NEW HIGH-PERFORMANCE BLADE SPINDLES

The new blade spindles of the ARIENS SUMMIT PRO models are made of cold-forged aluminium. They are particularly resistant to vibration and dissipate any heat generated. They are each equipped with two double ball bearings. The entire unit is sealed to prevent corrosion caused by moisture and dirt. Maximise service life and minimise downtime.



### LARGE 48 LITRE TANK

Constantly refilling the tank costs time and energy. That's why all ARIENS SUMMIT PRO models have an extra-large 48-litre tank to account for long working days.

### PUNCTURE-PROOF FRONT WHEELS

The large 15" and 360° swivelling front wheels are semi-pneumatic. This means that they are completely filled with rubber foam. Flat tyres and loss of pressure are therefore ruled out.



### CONVENIENT CUTTING HEIGHT ADJUSTMENT

A rotary wheel allows easy height adjustment between 2.5 and 13 cm. Spring-loaded foot pedal for easier lifting of the mower deck.



### ULTRA-SMOOTH MOWING, EVERY TIME

The high-quality PARKER® hydrostats are known for their smooth response when changing from forwards to reverse. In combination with the large 24" or 26" wheels, they offer maximum driving comfort and reduce wheel spin during turning manoeuvres.

### IT TAKES TIME TO CHANGE THE OIL

Extra-long oil change intervals for the hydrostats avoid inconvenient workshop visits during the season.


# FEATURES & BENEFITS

## SUMMIT PRO 300



### COMMERCIAL PARKER® HYDROSTATS

The professional Parker® HTJ hydrostats reach a top speed of 14.5 km/h and have a high-performance 12 cm<sup>3</sup> pump. The filters are easily accessible from the rear for easy maintenance. They are fully integrated hydrostats with few components. This minimises the risk of oil loss and enables easy maintenance.

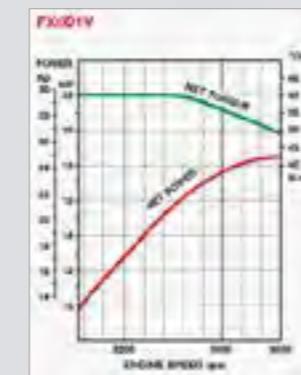

### POWERFUL PREMIUM KAWASAKI® FX 801V ENGINE

High-quality components and materials for lawn care on a large scale.



### FULL-SUSPENSION SEAT

The integrated, mechanical seat suspension of the ARIENS SUMMIT PRO 300 series can be precisely adjusted to the weight of the rider.


The armrests can be adjusted in height and are foldable. The adjustable lumbar support is essential for protecting the back.

## SUMMIT PRO 500



### PREMIUM PARKER® HYDROSTATS

Parker® HTG hydrostats reach a top speed of 21.3 km/h and have a 16 cm<sup>3</sup> high-performance pump. The filters are easily accessible from the rear for easy maintenance. The Parker® TG™ gerotor motor works particularly efficiently. This saves energy and delivers up to 10 % more motor power to the blades.

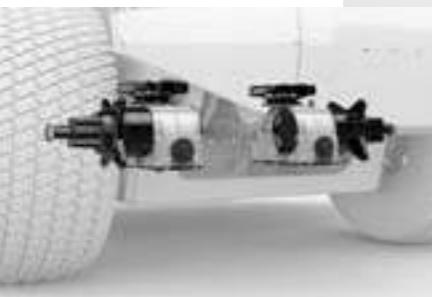

### MIGHTY 26" WHEELS

The bigger, the better. Drive wheels are essential for riding comfort. With a diameter of 26 inches, 66 cm, they can be ridden with particularly low air pressure for high suspension comfort. Uneven terrain is effectively smoothed out. Driving over curbs is easier and gentler on both the rider and machine.



### COMFORTABLE RUBBER ISOLATED FOOT PLATE

The angled footrest of the ARIENS SUMMIT PRO series is lined with rubber, limiting vibration to the operator. Less vibration means less fatigue and more relaxed working.



### AIR-RIDE COMFORT SEAT


By pressing a switch, you can adjust the air suspension of the Ariens AIR-RIDE seat exactly to your requirements. Special vibration isolators shield the entire seat from vertical shocks.

The extra high seat backrest, the adjustable armrests, the extra thick padding and the integrated lumbar support offer maximum seating comfort.



### POWERFUL PREMIUM KAWASAKI® FX 850V ENGINE

Uniform torque curve and double filter for performance and durability at the highest level.

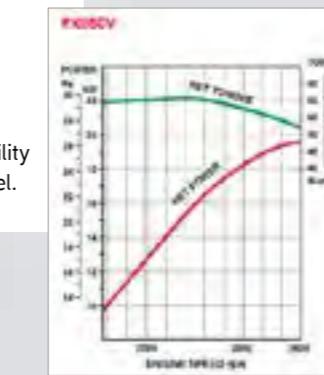

# ZENITH SERIES



POWERED BY  
**FUSIONCORE**

**3** YEAR\*  
BATTERY  
WARRANTY

**5** YEAR\*  
OR  
1500 HOURS  
WARRANTY

NO  
HOUR  
LIMIT  
FOR FIRST  
TWO YEARS



## MODEL OVERVIEW

|                            | ZENITH E 48                                 | ZENITH E 48R                                | ZENITH E 52                                 | ZENITH E 52R                                | ZENITH E 60                                 | ZENITH E 60R                                |
|----------------------------|---|---|---|---|---|---|
| MODEL                      | 997303                                      | 997306                                      | 997304                                      | 997307                                      | 997305                                      | 997308                                      |
| BATTERY TYPE               | 56V Li-Ion FusionCore<br>Swappable 4x 4 kWh |
| CUTTING WIDTH              | 122cm (48")                                 | 122cm (48")                                 | 132cm (52")                                 | 132cm (52")                                 | 152cm (60")                                 | 152cm (60")                                 |
| DECK TYPE                  | Side discharge                              | Rear discharge                              | Side discharge                              | Rear discharge                              | Side discharge                              | Rear discharge                              |
| MULCH KIT (OPTIONAL)       | Yes   | No  | Yes   | No  | Yes   | No  |
| MAX GROUND SPEED (FWD/REV) | 17.7km/h/8.8km/h<br>(11mph/5.5mph)          | 17.7km/h/8.8km/h<br>(11mph/5.5mph)          | 17.7km/h/8.8km/h<br>(11mph/5.5mph)          | 17.7km/h/8.8km/h<br>(11mph/5.5mph)          | 17.7km/h/8.8km/h<br>(11mph/5.5mph)          | 17.7km/h/8.8km/h<br>(11mph/5.5mph)          |

Accessories: page 56 / 57, specifications: page 62

## A BATTERY MOWER WITHOUT COMPROMISE

It makes a difference whether a zero-turn specialist builds a battery mower or a battery manufacturer builds a mower. The ZENITH E is based on the frame and cutting deck of the proven ZENITH petrol mower. We developed the electrical components of our Ariens FusionCore system ourselves. This is the only way we can be sure that these components also meet our requirements for a true professional battery mower. Compare the performance data of our ZENITH E with others and you will see the difference.


\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.



Road homologation  
kit as option

# FEATURES & BENEFITS

## ZENITH E BATTERY ZERO-TURN

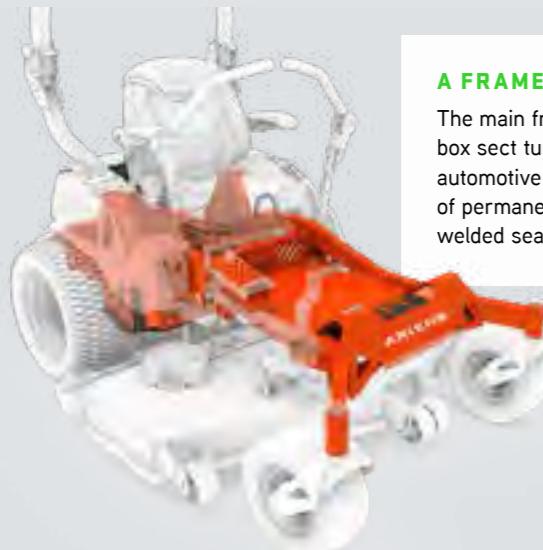


### A FRAME MADE TO LAST

The main frame of the ZENITH E consists of bent steel box sect tubes. The bending technology comes from automotive engineering. Bent tubes have the advantage of permanently withstanding loads. The risk of tearing welded seams is reduced.



### ECO MODE - DON'T WASTE ENERGY

The ZENITH E has an ECO mode switch. When there is little grass or when travelling at a slower speed, the highest blade speed is not required. In this case, use the ECO mode to reduce the blade speed to prolong battery life.

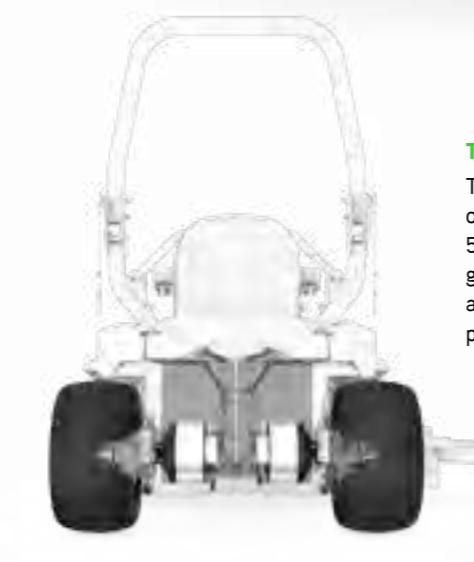

### THE MOST POWERFUL WHEEL DRIVE

The FusionCore wheel drives are actually oversized. But that's what we wanted. With 5 kW wheel motors mounted to planetary gearboxes results in increased torque and silky smooth ride. Overheating is also prevented.



### BLADE SLIP FEATURE

Ariens patent-pending spindle design can absorb impact, minimising the risk of serious damage. The unique blade slip feature allows the blade to slip momentarily should it hit a solid object, protecting the 3.5kW brushless spindle motors. The spindle has a replaceable bottom bearing allowing for servicing and maintenance without the need to replace the whole unit.



### QUIET OPERATION

At 87dB (L<sub>WA</sub> according to EN ISO 5395-3), the ZENITH E 60R is a whole 10dB quieter than its combustion engine sibling – good news for the driver and passers-by. It also offers the best values for body and hand/arm vibrations.



ZENITH E

### ENERGY RECOVERY DURING BRAKING

Not a single kilowatt of energy wasted. When braking, the kinetic energy is converted back into electrical energy and fed into the battery packs.



# ZENITH SERIES



Powered by  
**Kawasaki**

**4 YEAR\***  
OR  
750 HOURS  
WARRANTY



Picture shows the  
road homologation kit  
(page 52)

## MODEL OVERVIEW


|                            | ZENITH 52                          | ZENITH 52R                         | ZENITH 60                          | ZENITH 60R                         |
|----------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| MODEL                      | 991320                             | 991321                             | 991322                             | 991323                             |
| ENGINE                     | Kawasaki® FX730V 726cc             | Kawasaki® FX730V 726cc             | Kawasaki® FX730V 726cc             | Kawasaki® FX730V 726cc             |
| CUTTING WIDTH              | 132cm (52")                        | 132cm (52")                        | 152cm (60")                        | 152cm (60")                        |
| DECK TYPE                  | Side discharge                     | Rear discharge                     | Side discharge                     | Rear discharge                     |
| MULCH KIT (OPTIONAL)       | Yes                                | No                                 | Yes                                | No                                 |
| FRONT WHEEL SUSPENSION     | Standard                           | Standard                           | Standard                           | Standard                           |
| MAX GROUND SPEED (FWD/REV) | 13.7km/h / 6.4km/h (8.5mph / 4mph) |

Accessories: pages 56 / 57, specifications: page 64

## EVERYTHING A PROFESSIONAL NEEDS

The Ariens ZENITH was developed for professional, daily use and has a commercial cutter deck made of 3.6 mm sheet steel. It is available with side or rear discharge. The front wheel suspension and the fully suspended seat make all-day mowing much more comfortable. The comfort is measurable - in higher productivity and less fatigue. Premium components for long life are standard.

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

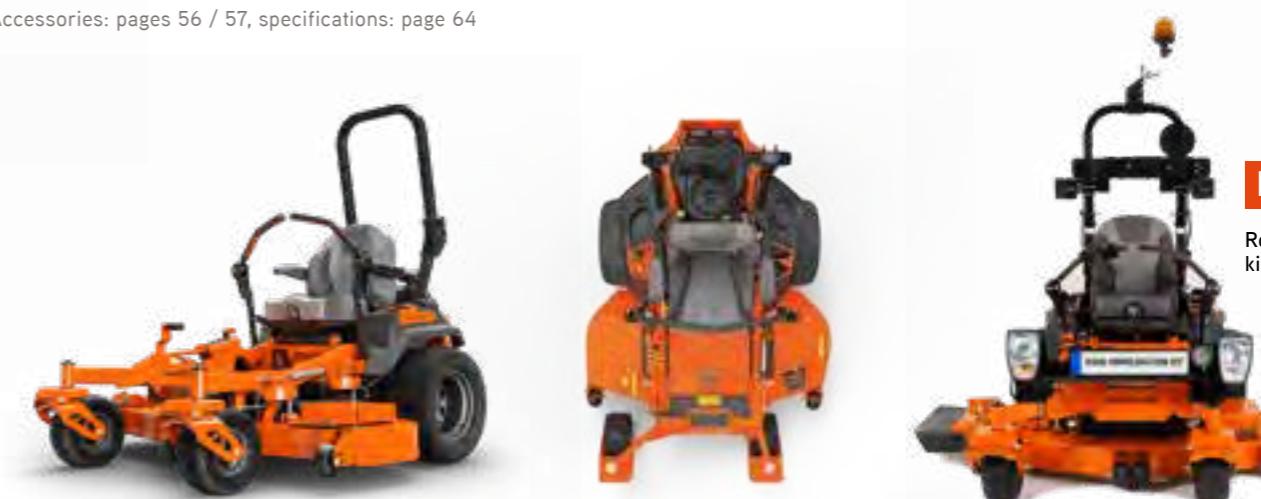

**NEW!**

Road homologation  
kit as option

# FEATURES & BENEFITS

## ZENITH ZERO-TURN

### FRONT SUSPENSION FORKS

The ZENITH absorbs bumps and shocks with its front suspension forks. This simple but robust system is stronger than considerably more expensive suspension systems. Try it out. An important feature for "frequent mowers".




### CONSTANT BELT TENSION (CBT)

The self-adjusting belt tension technology in CBT keeps belt tension constant, which maximises belt life, minimises wear and maintains a consistent, quality cut.

### HYDROSTATIC TRANSAKES

The two integrated pump and motor transaxles of the wheel drive come from the market leader HydroGear™. The ZT 3200 model in the ZENITH delivers up to 637 Nm of torque. The sensitivity and responsiveness of the drive allows you to work smoothly and with absolute precision. Long maintenance intervals mean you can keep mowing.

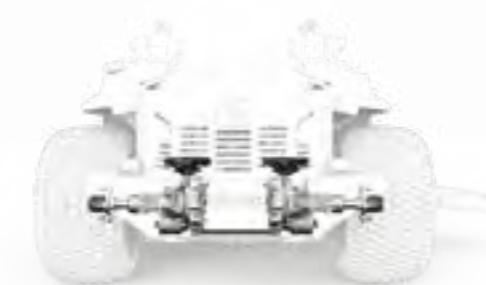

### FULL SUSPENSION SEAT

The ZENITH is fitted with a top-of-the-range comfort seat. It has fully adjustable suspension and an extra high adjustable backrest. Thick comfort padding, lumbar support and adjustable armrests adapt to the operator



### ROPS (ROLLOVER PROTECTION)

To protect the driver on slopes, the ZENITH is equipped with a rollbar and seatbelt as standard.



### ONE-PIECE TUBULAR FRAME

A large 3"x 1" box section tubular chassis with minimal welds carries the loads of the machine with unparalleled strength and stability.

### CUTTING HEIGHT ADJUSTMENT

A simple and intuitive foot-operated deck lifting system offers effortless adjustment to 15 cutting positions, in 6 mm increments. The cutting height is set by repositioning the deck height pin.



### HIGH PERFORMANCE KAWASAKI ENGINE

The Kawasaki FX730V engine is considered one of the best in its class. With a displacement of 726 cc and fitted with 2-stage cyclone filtration, it delivers maximum power to the transmissions and blades.



### PROFESSIONAL MOWER DECKS

ZENITH mower decks are suspended from four fixed points. Once adjusted, they maintain their level position even over uneven ground. A 13 mm steel edge protects the front and sides. The blade spindles are made of cold forged aluminium. These are more vibration resistant than castings and run up to 12°C cooler than steel spindles. With a depth of 14 cm, the deck allows a strong airflow for optimal cutting. Choose from side- or rear ejection mower decks (see page 10/11)



# APEX® SERIES



Powered by  
**Kawasaki**

**4** YEAR\*  
OR  
500 HOURS  
WARRANTY



## A LOT OF MACHINE FOR THE MONEY

The Ariens APEX is the star pupil in its class. It is made for users who have a lot to mow. It doesn't matter if you are a service provider or a private user with large grounds. In all aspects, it is professional – the frame, the engine, the wheel motors and especially the cutter deck. The frame and deck are from its big brother, the ZENITH. For years, APEX has offered top-class value for money.

## MODEL OVERVIEW

|                            | APEX 48                          | APEX 48R                         | APEX 52                          | APEX 52R                         |
|----------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| MODEL                      | 991324                           | 991325                           | 991326                           | 991327                           |
| ENGINE                     | Kawasaki® FR691 V-Twin 726cc     |
| CUTTING WIDTH              | 122cm (48")                      | 122cm (48")                      | 132cm (52")                      | 132cm (52")                      |
| DECK TYPE                  | Side discharge                   | Rear discharge                   | Side discharge                   | Rear discharge                   |
| MULCH KIT (OPTIONAL)       | Yes                              | No                               | Yes                              | No                               |
| MAX GROUND SPEED (FWD/REV) | 12.9km/h (8mph) / 6.4km/h (4mph) |

Accessories: page 56 / 57, specifications: page 66



# FEATURES & BENEFITS

## APEX ZERO-TURN



### KAWASAKI ENGINE

High-quality Kawasaki FR691V  
V-engine with 726 cc displacement.  
Reliable all-day power.



### PROFESSIONAL CUTTER DECKS

APEX cutter decks are identical to the decks found on the ZENITH. They are suspended from four fixed points. Once adjusted, they maintain their parallelism without warping. A 13 mm thick steel edge protects the front and sides. The blade spindles are made of cold forged aluminium. These are more vibration resistant than castings and run up to 12°C cooler than steel spindles. With a depth of 14 cm, the deck allows a strong airflow for optimal cutting.



### ONE-PIECE TUBULAR FRAME

A large 3"x 1" box section tubular chassis with minimal welds carries the loads of the machine with unparalleled strength and stability.



### CONSTANT BELT TENSION (CBT)

The self-adjusting belt tension technology in CBT keeps belt tension constant, which maximises belt life, minimises wear and maintains a consistent, quality cut.



### NEW ERGONOMIC CONTROL LEVERS

Thanks to their ergonomic shape the new steering levers fit perfectly in the hand.



### HYDRO-TRANSAXLES

Two HydroGear™ ZT 3100 commercial hydraulic motors deliver up to 474 Nm of torque. Sensitive, responsive for smooth operation. Maintenance interval 400 hours, after the first oil change.

### COMFORT SEAT

APEX is equipped with a thickly padded seat with a high backrest. The armrests are also thickly padded. The operator position is adjustable.

# IKON SERIES



**3 YEAR\***  
OR  
**300 HOURS**  
WARRANTY

Powered by  
**Kawasaki**

## MOW LARGE GARDENS QUICKLY AND COMFORTABLY

The newest and fastest way to mow your lawn. No matter how big your garden is. The new Ariens IKON sets new standards in terms of cutting pattern, comfort and features. The new Ariens IKON is difficult to categorise. It blurs the line between a mower for private users and a professional mower. The industry leading design and performance will set it apart from the rest. Discover it – for yourself!

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.



## MODEL OVERVIEW

|                               | IKON 42                             | IKON 52                             |
|-------------------------------|-------------------------------------|-------------------------------------|
| MODEL                         | 918300                              | 918301                              |
| ENGINE                        | Kawasaki® FR651<br>726cc            | Kawasaki® FR691<br>726cc            |
| CUTTING WIDTH                 | 107cm (42")                         | 132cm (52")                         |
| DECK TYPE                     | Side discharge                      | Side discharge                      |
| MULCH KIT (OPTIONAL)          | Yes                                 | Yes                                 |
| MAX GROUND SPEED<br>(FWD/REV) | 11.2km/h (7mph) /<br>4.8km/h (3mph) | 11.2km/h (7mph) /<br>4.8km/h (3mph) |

Accessories: page 56 / 57, specifications: page 67



# FEATURES & BENEFITS

## IKON ZERO-TURN



### CAREFREE WHEEL DRIVE:

The two separate hydrostatic EZT® wheel motors from HYDRO-GEAR® are service-free and guarantee a smooth driving experience.



### POWER RESERVES AND RELIABILITY

The Kawasaki® FR engine series on the IKON is the top benchmark in its class. It delivers the power and performance needed in the toughest conditions.



The new Ariens ENVY™ mower deck has it all. We have put all our experience into its new design.

- **Durability:** 2.9 mm sheet steel, solid edge protection, fully welded.
- **Constant high quality of cut:** 4-point suspension for permanent fixation and parallelism.

### WHAT GOOD IS A MOWER IF IT DOESN'T MOW?

- **Three caged anti-scalp wheels:** The integrated anti-scalp wheels prevent damage to the lawn and the machine in the event of ground contact.
- **Robust 3-blade cutting system:** Blade spindles made of forged aluminium. Cooler running and more impact and vibration resistant than cast spindles.
- **Optimised airflow:** The Ariens ENVY™ mower deck has an optimised airflow thanks to new baffles and an improved discharge. Essential for its excellent cutting pattern.

### STABILITY AND DURABILITY:

As with the professional series, the IKON has a fully welded tubular frame.



### SEATING COMFORT

An extra high backrest supports the back. The raised seat base makes it easier to stand up and sit down. Folding armrests relieve pressure on the shoulders. Imitation leather upholstery with decorative stitching.



### FOOT-OPERATED DECK ADJUSTMENT

Stability has its weight. The solid mower deck is simply lifted by foot pedal while seated. Also available with optional spring support on request.



### ERGONOMIC AND ADJUSTABLE CONTROL LEVERS

The new Ariens drive levers allow precise, tool-free adjustment of the drive levers in all four directions.



### EXTRA LARGE WHEELS

20" wheels ensure high suspension comfort, strong traction and low ground pressure. They also make it easier to drive over edges. Recommended tyre pressure: 0.6 – 0.75 bar.



### INTEGRATED AND INTUITIVE BRAKE

The parking brake is activated by simply folding out the drive levers.



### CHARGING AND STOWING

Drinks and mobile phones can be stored in the practical storage box. Two USB charging sockets are standard (USB-A and USB-C).



### CUTTING HEIGHT ADJUSTMENT

A magnetic bolt allows you to conveniently select one of the 13 cutting heights from a seated position.



### DUAL LED FRONT LIGHTS

Standard, integrated, super-bright front lights with 600 lumens show the way.

# EDGE SERIES



**2 YEAR\***  
OR  
**150 HOURS**  
WARRANTY



## ENJOY ALL THE ADVANTAGES OF A ZERO-TURN ON YOUR LAWN

Zero-turn mowers are not just for large areas. With its compact dimensions, the EDGE brings speed and manoeuvrability to even the most winding gardens. In the 86 cm cutting width it is equipped with a stamped mower deck and in the 107 cm cutting width with a welded mower deck. A robust 4-point cutter deck suspension and cutting height adjustment via foot pedal are standard. A comfortable seat with a cut-out back and good legroom ensure comfort. Its maintenance-free wheel drive reduces maintenance intervals. The EDGE is powered by an Ariens 2-cylinder 635 cc engine.

## MODEL OVERVIEW


|                            | EDGE 34                         | EDGE 42                         |
|----------------------------|---------------------------------|---------------------------------|
| MODEL                      | 915338                          | 915339                          |
| ENGINE                     | Ariens 635cc                    | Ariens 635cc                    |
| CUTTING WIDTH              | 86cm (34")                      | 107cm (42")                     |
| DECK TYPE                  | Side discharge                  | Side discharge                  |
| MULCH KIT (OPTIONAL)       | Yes                             | Yes                             |
| MAX GROUND SPEED (FWD/REV) | 9.6km/h (6mph) / 4.8km/h (3mph) | 9.6km/h (6mph) / 4.8km/h (3mph) |

Accessories: page 56 / 57, specifications: page 67



# FEATURES & BENEFITS

## EDGE ZERO-TURN

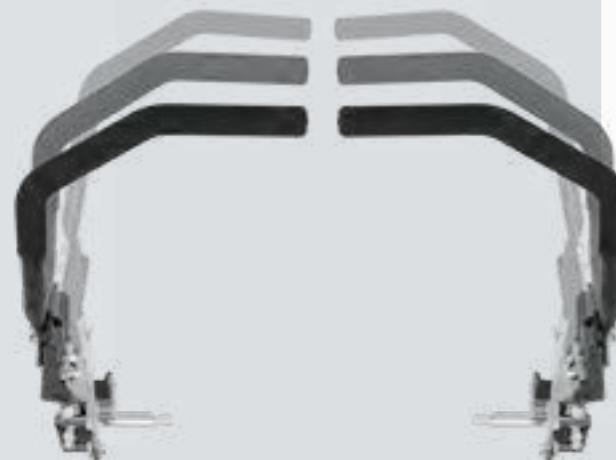

### INTUITIVE CONTROL

Anyone can drive a zero-turn. After just 20 minutes, you will love the precision and sensitivity. Each wheel motor can be controlled individually and independently of the other. This makes a 360° zero-turn possible.



### HYDRO-TRANSAXLES

Two HydroGear™ EZT hydraulic transmissions are maintenance-free and reliable.




### COMPACT CUTTER DECKS

Choose between cutting widths of 86 cm or 107 cm. With the optional mulching kit fitted, the side discharge deflector can also be removed and the overall width is reduced. Advantageous for narrow passages.



### 4-POINT CUTTER DECK SUSPENSION

The four-point deck lift system offers unmatched stability and consistent cutting.

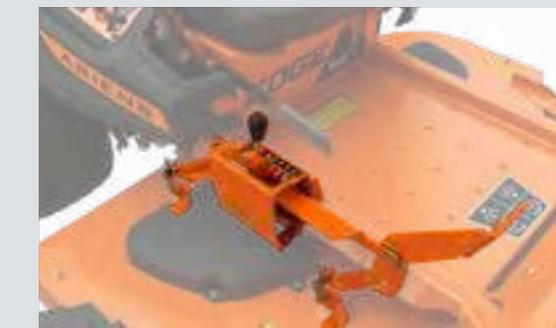

### CUTTING HEIGHT ADJUSTMENT

A simple and intuitive foot-operated deck lifting system offers effortless adjustment to seven cutting positions.



### POWERFUL ENGINE

The powerful Ariens 635 cc engine has earned a reputation for reliability and performance over the years.



### COMFORTABLE SEAT

The EDGE is equipped with a padded seat with a cut-out back for better ventilation. It is adjustable for the operator.



# STAND-ON ZERO-TURN MOWER

THE PROFESSIONAL'S CHOICE

**NEW:** THE COMFORT AND SPEED OF A  
ZERO-TURN MOWER **PLUS**

**+** **COMPACT DIMENSIONS**

Especially short and low construction. With a cutting width of 81 or 91 cm, ideal for small, medium and narrow access areas. Saves space and weight during transport.

**+** **AGILE HANDLING**

Manoeuvres around obstacles tightly and quickly due to a low centre of gravity and low height. Suitable for mowing across slopes up to 20°.

**+** **ERGONOMIC WORKING POSITION**

Upright driving position on a sprung footboard. Gentle on the back and less tiring. Provides a sense of security for the operator.

**+** **PRACTICAL HANDLING**

Easy and quick mounting and dismounting. Removing obstacles. Operating the machine with the footboard raised in tight, low and steep situations.

**+** **BETTER VISIBILITY**

Cutter deck fully visible to the operator. Precise driving along edges. Reduces annoying 'touch-up' work and minimises risk of collisions.

# ARROW E SERIES



POWERED BY  
**FUSIONCORE**



## A NEW LEVEL OF MANOEUVRABILITY AND ERGONOMICS - FULLY ELECTRIC

Two current trends are coming together. The increasing demand for professional battery mowers and the easy handling of a stand-on mower. The new ARROW E uses the proven Ariens FusionCore swappable battery system and is compatible with all ZENITH E models.

**3** YEAR\*  
BATTERY  
WARRANTY

**5** YEAR\*  
OR  
1500 HOURS  
WARRANTY

NO  
HOUR  
LIMIT  
FOR FIRST  
TWO YEARS

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.



## MODEL OVERVIEW

|                               | ARROW E 48                                  | ARROW E 48 R                                | ARROW E 52                                  | ARROW E 52 R                                |
|-------------------------------|---|---|---|---|
| MODEL                         | 998301                                      | 998304                                      | 998302                                      | 998305                                      |
| BATTERY TYPE                  | 56V Li-Ion FusionCore<br>Swappable 4x 4 kWh |
| CUTTING WIDTH                 | 122cm (48")                                 | 122cm (48")                                 | 132cm (52")                                 | 132cm (52")                                 |
| DECK TYPE                     | Side discharge                              | Rear discharge                              | Side discharge                              | Rear discharge                              |
| MULCH KIT (OPTIONAL)          | Yes   | No  | Yes   | No  |
| MAX GROUND SPEED<br>(FWD/REV) | 17.7km/h / 8.8km/h<br>(11mph / 5.5mph)      |

Accessories: page 56 / 57, specifications: page 63



# FEATURES & **BENEFITS**

## ARROW E BATTERY STAND-ON



### FOOT-ASSISTED CUTTER DECK ADJUSTMENT

Quality has its weight. The solid cutter deck of the ARROW E is welded from 4.5 mm thick sheet steel. The height of the deck is adjusted smoothly via a combined system of foot pedal and hand lever.



### SPINDLE MOTORS WITH SLIPPING CLUTCH

The high performance brushless blade spindle motors are equipped with a slip clutch. In the event of a collision with a solid object, it allows the blade to "slip through" and thus protect the motor from damage. If required, the cutter shafts and lower bearings are replaceable.



### LED-DISPLAY / INTERFACE

The colour LED display keeps you constantly informed. Charging state of batteries. Operating modes. Operating hours counter. System diagnosis and fault messages.



### INTUITIVE CONTROLS

All functions of the machine are in the field of vision and within reach of the operator. The maximum travel speed can be limited via a quick-action mechanism with magnetic plug. Electric parking brake and two driving speed levels.



### ECO MODE - DON'T WASTE ENERGY

The ARROW E has an ECO mode switch. When there is little grass or when travelling at a slower speed, the highest blade speed is not required. In this case, use the ECO mode to reduce the blade speed to prolong battery life.



### FOLDING DRIVER'S PLATFORM

The spring-loaded driver's platform can be folded upwards for transport. It can also be used when working under low-hanging branches or when driving across slopes of up to 20°. In no time, the ARROW E becomes a hand-guided "walk-behind" mower.



### QUICKSWAP BATTERY CHANGING SYSTEM

The ARROW E uses the same four 56V battery packs as the ZENITH E. Even with only two batteries, moving can be done at full power. Even a single battery pack is sufficient for transporting the machine. Fast charging of the four batteries from 0-100% in only 5.3 hours.

# ARROW SERIES



Powered by  
**Kawasaki**

**5** YEAR\*  
OR  
1000 HOURS  
WARRANTY | NO  
HOUR  
LIMIT  
FOR FIRST  
TWO YEARS



## ACCESS ALL AREAS

The ARROW offers the advantages of a zero-turn mower, but with the compact dimensions of a large walk-behind mower and a near perfect view of the area to be mowed and the cutter deck. The ARROW combines the best of both worlds and can mow larger lawns as well as narrow areas, between beds and in tight spaces. As the name suggests, the ARROW offers both speed and precision. In daily use, you will appreciate the easy mounting and dismounting and its small footprint on a trailer.

## MODEL OVERVIEW

|                            | ARROW 32                         | ARROW 36                         |
|----------------------------|----------------------------------|----------------------------------|
| MODEL                      | 994302                           | 994303                           |
| ENGINE                     | Kawasaki® FS600 V-Twin 603cc     | Kawasaki® FS600 V-Twin 603cc     |
| CUTTING WIDTH              | 81cm (32")                       | 91cm (36")                       |
| MULCH KIT (OPTIONAL)       | Yes                              | Yes                              |
| MAX GROUND SPEED (FWD/REV) | 12.8km/h (8mph) / 4.8km/h (3mph) | 12.8km/h (8mph) / 4.8km/h (3mph) |

Accessories: page 56 / 57, specifications: page 65



# FEATURES & BENEFITS

## ARROW STAND-ON



### DASHBOARD

The operator has everything in view and under control. Throttle, choke, fuel gauge, drive levers, cutting height adjustment and parking brake. An adjustable cruise bar allows the speed to be limited according to the area of use.



### LOW CENTRE OF GRAVITY

The ARROW is suitable for driving across slopes up to 20°. The standing working position gives the operator direct control of the machine. In particularly tight situations, the machine can be guided by hand with the platform folded up.



### EXCELLENT VISIBILITY

From the operator's position, the entire cutter deck can be seen. This enables precise driving around obstacles




### FITS THROUGH NARROW AREAS AND GATES

Both the 81cm (32") and the 91cm (36") cutter deck allow access to twisty and narrow gardens. The ARROW is the most compact zero-turn mower from Ariens. Due to its high ground speed, it also works well in medium-sized areas.

### HEAVY DUTY MOWER DECK

On any mower, the cutter deck is the most stressed part, especially in daily, commercial use. The ARROW is made for that. Its cutting deck is made of 4.5 mm thick welded sheet steel.

The highly stable blade supports are made of forged aluminium and offer greater strength than comparable cast parts. A foot-assisted height adjustment facilitates operation

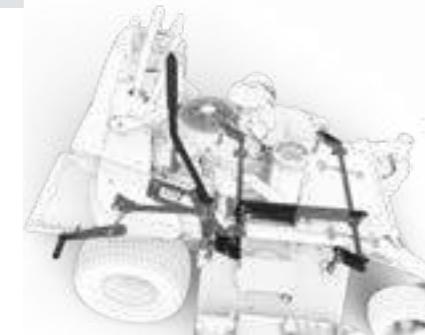

# ACCESSORIES OVERVIEW

|   | NEW!  | NEW!                           | SUMMIT PRO 300  | SUMMIT PRO 500                                       | ZENITH E                       | ZENITH    | APEX   | IKON                           | IKON XD                        | EDGE  | ARROW E                        | ARROW |
|---|---|--------------------------------|---|--|--------------------------------|-----------|--|--------------------------------|--------------------------------|---|--------------------------------|-------|
| <b>MULCH KIT WITH BLADES</b><br>(only for models with side discharge)                             | 48": 79109600<br>52": 79220200<br>60": 79220300 | 60": 79220300<br>72": 79220400 | 48": 79701800<br>52": 79701900<br>60": 79702000<br>model 997305 | 52": 79105800<br>60": 79105900                       | 48": 79105700<br>52": 79105800 | -         | -  | 42": 71513900<br>52": 71514000 | 34": 71510800<br>42": 71516000 | 48": 79701800<br>52": 79800100                            | 32": 79403200<br>36": 79403300 |       |
| <b>MULCHKIT WITHOUT BLADES</b>  | -   | -                              | -   | -  | -                              | -         | 42": 71803100<br>52": 71803200<br>Mulching blade is standard | -                              | -                              | -   | -                              |       |
| <b>STRIPING KIT</b>   | 79221800  | 79221800                       | 79221800  | 79206700   | 79206700                       | 71800500  | 79206700   | -                              | -                              | -   | -                              |       |
| <b>TRAILER HITCH KIT</b>  | 79215800  | 79215800                       | 79202300  | 79202300   | 79202300                       | 71801300  | 71514900   | 71502800                       | -                              | -   | -                              |       |
| <b>MOWER DECK TRANSPORT LOCK KIT</b>  | -   | -                              | -   | -  | -                              | 71800600  | -  | -                              | -                              | -   | -                              |       |
| <b>DECK LIFT SPRING ASSIST KIT</b>  | -   | -                              | -   | -  | -                              | 71801600  | -  | -                              | -                              | -   | -                              |       |
| <b>DECK BUMPER KIT</b>  | -   | -                              | -   | -  | -                              | 71516400  | -  | -                              | -                              | -   | -                              |       |
| <b>OPERATOR CONTROLLED CHUTE BAFFLE FOR SIDE DISCHARGE MODELS</b>                                 | 48": 79223400<br>52"/60": 79223700              | 60"/72": 79223700              | 79110000  | 79110000   | 79110000                       | -         | -  | -                              | -                              | 79110000  | 79110000                       |       |
| <b>ROPS (ROLL OVER PROTECTION STRUCTURE) WITH SEAT BELT</b>                                       | -   | -                              | -   | -  | 89101100                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>ELECTRIC DECK LIFT</b>   | 79221100  | 79221100                       | -   | -  | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>ENTRY ASSIST HANDLE KIT</b>  | 71801200  | 71801200                       | -   | -  | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>FLEXTEND SHOULDER SUPPORT</b>  | -   | -                              | -   | -  | -                              | -         | -  | 79102300                       | -                              | -   | -                              |       |
| <b>ARM REST KIT</b>   | -   | -                              | -   | -  | -                              | -         | -  | 71508400                       | -                              | -   | -                              |       |
| <b>SEAT ISOLATOR KIT</b>  | -   | -                              | -   | -  | 79110500                       | 71801900  | -  | -                              | -                              | -   | -                              |       |
| <b>SEAT SPRING KIT</b>  | -   | -                              | -   | -  | 79107000                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>SUSPENSION FORKS KIT</b>   | -   | -                              | 79108300<br>(79703000 model 997201/997302)                      | -  | 79109000                       | -         | -  | -                              | -                              | 79108300  | -                              |       |
| <b>FULL SUSPENSION SEAT</b>   | -   | -                              | -   | standard   | 79111300                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>AIR-RIDE AIR SUSPENSION SEAT</b>   | 79225400  | standard                       | -   | -  | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>LED FRONT LIGHTING KIT</b>   | 79222900  | 79222900                       | 79700400  | 79108600   | 79108600                       | standard  | 71514100   | 71517600                       | -                              | -   | -                              |       |
| <b>USB PORT ADAPTER KIT</b>   | -   | -                              | -   | 79111200   | 79111200                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>12V POWER OUTLET</b>   | 79225300  | 79225300                       | -   | -  | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>RUBBER MAT</b>   | -   | -                              | 79110800  | 79110800   | 79110800                       | 71801400  | 70714300   | -                              | -                              | -   | -                              |       |
| <b>TRIMMER MOUNT KIT</b>  | -   | -                              | -   | -  | -                              | -         | -  | -                              | -                              | -   | 79403800                       |       |
| <b>COVER FOR ALL RIDE-ON ZT-MOWERS UP TO 60"</b>  | 71515200  | 60": 71515200                  | 71515200  | 71515200   | 71515200                       | 71515200  | 71515200   | 71515200                       | 71515200                       | -   | 71515200                       |       |
| <b>DOUBLE ANTI-SCALP WHEEL KIT</b>  | 71517400  | 71517400                       | 71517400  | 71517400   | 71517400                       | -         | -  | -                              | -                              | 71517400  | 71517400                       |       |
| <b>MICHELIN TWEEL FRONT CASTER KIT 13"</b>  | 79223600  | 79223600                       | -   | 79110900   | 79110900                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>MICHELIN TWEEL KIT REAR (SET OF 2)</b>   | 79219600  | 79220500                       | 79702900  | 79702900   | 79702900                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>AGGRESSIVE PROFILE REAR TYRE KIT (SET OF 2)</b>  | 79205200  | -                              | -   | 79108900   | 79108900                       | -         | -  | -                              | -                              | -   | -                              |       |
| <b>13" SEMI-PNEUMATIC FRONT WHEEL KIT (SET OF 2)</b>  | standard 15"                                    | standard 15"                   | 79105200  | 79105200   | 79105200                       | -         | -  | -                              | -                              | standard  | standard 11"                   |       |
| <b>SUNSHADE KIT ROPS MOUNTED</b>  | -   | -                              | -   | 79212600   | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>MOBILE OFF-BOARD CHARGER FUSIONCORE WITHOUT BATTERIES</b>                                      | -   | -                              | 89700300  | -  | -                              | -         | -  | -                              | -                              | 89700300  | -                              |       |
| <b>MOBILE OFF-BOARD CHARGER FUSIONCORE WITH 2 BATTERIES</b>                                       | -   | -                              | G10199006   | -  | -                              | -         | -  | -                              | -                              | G10199006   | -                              |       |
| <b>MOBILE OFF-BOARD CHARGER FUSIONCORE WITH 4 BATTERIES</b>                                       | -   | -                              | G10199004   | -  | -                              | -         | -  | -                              | -                              | G10199004   | -                              |       |
| <b>BATTERY PACK FUSION CORE 56V 4KWH 1 PIECE</b>  | -   | -                              | 1 pc.: 89700100<br>2 pcs.: G10199005<br>4 pcs.: G10199007       | -  | -                              | -         | -  | -                              | -                              | 1 pc.: 89700100<br>2 pcs.: G10199005<br>4 pcs.: G10199007 | -                              |       |
| <b>FAST CHARGER FUSIONCORE WITH Y-HARNESS</b>   | -   | -                              | 79701300  | -  | -                              | -         | -  | -                              | -                              | 79701300  | -                              |       |
| <b>STANDARD CHARGER FUSIONCORE</b>  | -   | -                              | 79700600  | -  | -                              | -         | -  | -                              | -                              | 79700600  | -                              |       |
| <b>Y-HARNESS KIT FOR COUPLING TWO STANDARD CHARGERS</b>   | -   | -                              | 9189200 (PAM)   | -  | -                              | -         | -  | -                              | -                              | 9189200 (PAM)   | -                              |       |
| <b>BEACON LIGHT LED</b>   | -   | -                              | 79700500  | -  | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>BEACON LIGHT LED FOR ROAD HOMOLOGATION KIT</b>   | -   | -                              | G10199000   | G10199000  | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>ROAD HOMOLOGATION KIT (ECE compliant components)</b>   | -   | -                              | G10199002<br>(national individual approval required)            | G10199001<br>(national individual approval required) | -                              | -         | -  | -                              | -                              | -   | -                              |       |
| <b>TYRE SEALANT "AS PLATTFUSS-STOP", 950 ML (sufficient for two front tyres or one rear tyre)</b> | G00041068                                       | G00041068                      | G00041068   | G00041068  | G00041068                      | G00041068 | G00041068  | G00041068                      | G00041068                      | G00041068   | G00041068                      |       |

## ZENITH E ACCESSORIES

|   |   |  |  |
|---|---|--|--|
|   | <b>56V BATTERY KITS</b><br>Additional FusionCore 56V Li-Ion swappable battery, 4,0 kWh. <ul style="list-style-type: none"><li>- Single battery</li><li>- Kit of 2 or 4 batteries</li><li>- Kit of 2 or 4 batteries incl. offboard charger kit</li></ul> |    | <b>OFF BOARD CHARGER KIT</b><br>Charge up to four additional batteries outside of the machine. Charging time 4 batteries 0-100%: 12 hours. Option to upgrade to Fast Charger. Also available as kit with 2 or 4 batteries. |
|   | <b>FAST CHARGER WITH Y HARNESS KIT</b><br>Additional charger. Charges the four batteries in the machine in just 5.3 hours.  |    | <b>MULCH KIT</b><br>For installation in side discharge cutter decks. Ensures a clean mulching result. Closes the side discharge. Side deflector can then be removed.   |
|    | <b>OPERATOR CONTROLLED CHUTE BAFFLE</b><br>For all side discharge cutter decks. Controls the ejection distance of the clippings with a hand lever.  |   | <b>STRIPING KIT</b><br>Creates a striped lawn. For side discharge/mulch kit models.  |
|   | <b>FLOOR MAT</b><br>Increases riding comfort. The mat absorbs vibrations at the feet and prevents slipping while riding and when getting on and off. Weatherproof, made of 100% rubber.   |  | <b>SUSPENSION FORKS KIT</b><br>Reduces vibrations and shocks for increased operator comfort. Matched to the weight of the ZENITH E.  |
|  | <b>13" SEMI-PNEUMATIC FRONT TYRE KIT</b><br>Puncture proof.   |  | <b>"TWEELS" KIT</b><br>Lasts as long as 2-3 conventional sets of pneumatic tyres. 100% puncture proof.   |
|   | <b>LED HEADLIGHT KIT</b><br>For mounting on the side frame.   |  | <b>BEACON LIGHT KIT</b><br>LED warning light for mounting on the ROPS rollover protection. Increases visibility.   |
|   | <b>ROAD HOMOLOGATION KIT</b><br>Lighting kit is available for use on public roads. Installation by specialised dealers. National individual road approval required. ECE compliant components.   |  | <b>BEACON LIGHT LED KIT</b><br>Optional 360° LED rotating beacon light. Use in combination with road homologation kit.   |

“ We find that Ariens' machines are built to a very high standard and are competitively priced. The very positive feedback we get from our customers, cements our confidence in the brand. We believe Ariens are the market leader for zero-turns in the UK and we're proud to be a dealer.

**MARK AND AMANDA BROWN**  
M&A BROWN & SONS



## WHAT DO OUR DEALERS SAY ABOUT ARIENS PRODUCTS?



“ Ariens machines are reliable, offer value for money and provide excellent performance even in demanding conditions.

**DAVID WEBSTER**  
MOWERPOWER LTD




“ Arthur Ibbett Ltd have been an Ariens dealer for 40 years now and will continue to be as they offer a great range of machines at an affordable price.

**LOUISE DANBURY-PETERS**  
ARTHUR IBBETT LTD

# ZERO-TURN ACCESSORIES

More accessories see page 50
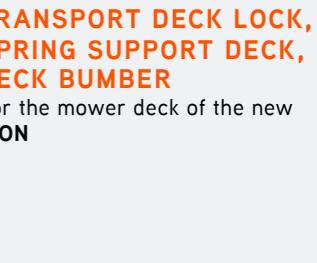
|  |   |  |   |   |  |   |  |   |  |
|--|---|--|---|---|--|---|--|---|--|
|    | <b>MULCHING KIT WITH BLADES</b><br>When using the optional mulching kit, baffles are screwed into the prepared mower deck and form separate mulching sections in the deck. The material being mowed is finely shredded and remains on the surface.<br>For <b>ALL MODELS</b> with side discharge |    | <b>LAWN STRIPING - KIT</b><br>Creates an appealing striped look, just like on a football pitch.<br>For <b>SUMMIT PRO, ZENITH, ZENITH E, APEX, IKON</b>  |    | <b>TRIMMER MOUNT KIT</b><br>Take your trimmer with you.<br>For <b>ARROW</b>  |    | <b>TYRE SEALANT</b><br>Quickly seals and eliminates punctures in all tyres.  |    | <b>"TWEELS®" AIR-LESS REAR WHEEL KIT</b><br>High mileage of up to four standard tyre sets and full puncture protection.<br>For <b>SUMMIT PRO, ZENITH E, ZENITH, APEX</b> |
|    | <b>OPERATOR-CONTROLLED SIDE DISCHARGE</b><br>Adjust the throw range of the side discharge during mowing. Close it completely if necessary.<br>For all side discharge mowers decks of <b>SUMMIT PRO, ZENITH, ZENITH E, APEX, ARROW, ARROW E</b>  |    | <b>SUSPENSION FORKS KIT</b><br>Reduces vibrations and shocks for increased driving comfort<br>For <b>APEX, ZENITH E, ARROW E</b>  |    | <b>HIGH PROFILE "BAR TYRE" WHEEL KIT</b><br>For increased traction on wet soils. Agricultural tread.<br>For <b>SUMMIT PRO 300, ZENITH, APEX</b>  |  | <b>13" SEMI-PNEUMATIC FRONT WHEEL KIT</b><br>Never run flat again.<br>For <b>ZENITH E, ZENITH, APEX</b>  |   |  |
|  | <b>FULL SUSPENSION SEAT KIT</b><br>Replaces standard seat. Fully adjustable integrated seat suspension.<br>For <b>APEX</b>  |  | <b>SEAT ISOLATOR</b><br>Rubber elements reduce vibrations.<br>For <b>APEX, IKON</b>   |   | <b>SEAT SPRING KIT</b><br>For a more comfortable ride.<br>For <b>APEX</b>  |   | <b>ROAD HOMOLOGATION KIT</b><br>Lighting kit is available for use on public roads. Installation by specialised dealers. National individual road approval required. German TÜV certificate available. ECE compliant components.<br>For <b>ZENITH, ZENITH E</b> |   | <b>BEACON LIGHT LED KIT</b><br>Optional 360° LED rotating beacon light. Use in combination with road homologation kit.<br>For <b>ZENITH, ZENITH E</b>                    |
|  | <b>AIR-RIDE SEAT</b><br>Variable pneumatic suspension with adjustable arm rests and lumbar support.<br>For <b>SUMMIT PRO 300</b>  |  |   |  | <b>ZERO-TURN COVER</b><br>Protect your investment and extend the life of your equipment with an Ariens zero-turn cover.<br>Fits all models with 60" mower deck.  |    | <b>ROPS KIT</b><br>Increases security for the operator. Ergonomic shape protects the driver's elbows from impact.<br>For <b>APEX</b>   |  | <b>SUNSHADE KIT ROPS MOUNTED</b><br>For <b>ZENITH</b>  |
|  | <b>HITCH KITS</b><br>Transform your Ariens zero-turn into a versatile machine simply by adding the hitch. The kit's robust design allows you to tow a range of accessories.<br>For <b>SUMMIT PRO, ZENITH, APEX, IKON, EDGE</b>  |  | <b>FLOOR MAT</b><br>Increases driving comfort. The mat absorbs vibrations on the feet and prevents feet from slipping while driving and when dismounting. 100% weatherproof rubber. Easy to remove for cleaning.<br>For <b>IKON, APEX, ZENITH</b> |  | <b>ELECTRIC DECK LIFT KIT</b><br>You can adjust the deck at the touch of a button. Either to the highest transport position or to your set cutting height. Replaces the foot pedal.<br>For <b>SUMMIT PRO</b> |    | <b>ENTRY ASSIST HANDLE KIT</b><br>Practical metal bar with handle makes it easier to get on and off the machine regularly.<br>For <b>SUMMIT PRO</b>  |   |  |
|  | <b>FLEXTEND™ SHOULDER SUPPORT SYSTEM</b><br>Gives additional support to the shoulder area when mowing for extended periods.<br>For <b>EDGE</b>  |  | <b>LED HEADLIGHT - KIT</b><br>Two extra bright front lights. With switch. Easy installation thanks to existing wiring.<br>For <b>SUMMIT PRO, ZENITH, ZENITH E, APEX</b>   |  | <b>12 VOLT OUTLET SOCKET</b><br>Charge your mobile phone using the optional charging socket.<br>For <b>SUMMIT PRO</b>  |    | <b>USB-ADAPTER</b><br>For <b>APEX, ZENITH</b>  |  | <b>TRANSPORT DECK LOCK, SPRING SUPPORT DECK, DECK BUMPER</b><br>For the mower deck of the new <b>IKON</b>  |

# SPECIFICATIONS\*\*

|  | ZENITH E 48   | ZENITH E 48R  | ZENITH E 52   | ZENITH E 52R  | ZENITH E 60   | ZENITH E 60R  |
|--|---|---|---|---|---|---|
| MODEL #  | 997303  | 997306  | 997304  | 997307  | 997305  | 997308  |
| BATTERY TYPE   | 56V FusionCore Lithium Ion Swappable                              |
| BATTERY CAPACITY                                       | 4x 4 kWh  |
| BATTERY NUMBER   | 4 interchangeable   |
| CHARGE TIME  | 5.3 - 12 hours (depending on charger)                             |
| DRIVE DESCRIPTION                                      | Proprietary Electric Transaxle                                    |
| MAX SPEED FWD/REV (APPROX)                             | 17.7km/h / 8.8km/h (11mph / 5.5mph)                               |
| DECK TYPE  | Side Discharge  | Rear Discharge  | Side Discharge  | Rear Discharge  | Side Discharge  | Rear Discharge  |
| MULCH KIT  | Optional  | —   | Optional  | —   | Optional  | —   |
| DECK MATERIAL  | 4.5 mm sheet steel  |
| DECK CONSTRUCTION                                      | Fabricated  | Fabricated  | Fabricated  | Fabricated  | Fabricated  | Fabricated  |
| SPINDLES   | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. |
| DECK LIFT SYSTEM                                       | Foot Operated   |
| CUTTING WIDTH  | 122cm (48")   | 122cm (48")   | 132cm (52")   | 132cm (52")   | 152cm (60")   | 152cm (60")   |
| CUTTING HEIGHTS  | 3.8cm (1.5") – 12.7cm (5")  |
| CUTTING POSITIONS                                      | 15  | 15  | 15  | 15  | 15  | 15  |
| FRONT AXLE   | Fixed, greasable caster fork tubes                                |
| WHEELS (FRONT)   | 33cm x 16.5cm (13" x 6.5-6")                                      |
| WHEELS (BACK)  | 55.9cm x 25.4cm (22" x 10"-12")                                   | 55.9cm x 25.4cm (22" x 10"-12")                                   | 55.9cm x 25.4cm (22" x 10.5"-12")                                 | 55.9cm x 25.4cm (22" x 10.5"-12")                                 | 55.9cm x 25.4cm (22" x 12"-12")                                   | 55.9cm x 25.4cm (22" x 12"-12")                                   |
| LED INTERFACE W/ HOUR COUNTER & 2 USB CHARGING SOCKETS | Standard  | Standard  | Standard  | Standard  | Standard  | Standard  |
| SEAT   | Full suspension, adjustable seat with high backrest and armrests  | Full suspension, adjustable seat with high backrest and armrests  | Full suspension, adjustable seat with high backrest and armrests  | Full suspension, adjustable seat with high backrest and armrests  | Full suspension, adjustable seat with high backrest and armrests  | Full suspension, adjustable seat with high backrest and armrests  |
| WEIGHT   | 572kg (1,261lbs)  | 584kg (1,286lbs)  | 5834kg (1,284lbs)   | 590kg (1,301lbs)  | 595kg (1,312lbs)  | 602kg (1,326lbs)  |
| LENGTH   | 211cm (83")   | 211cm (83")   | 211cm (83")   | 211cm (83")   | 211cm (83 in)   | 211cm (83")   |
| WIDTH  | 160cm (63") w/ chute  | 124 cm (49")  | 171cm (67") w/ chute  | 137cm (54")   | 190cm (75") w/ chute  | 156.5cm (62")   |
| HEIGHT   | 124.5cm (49") w/ ROPS folded down<br>182.9cm (72") w/ ROPS up     | 124.5cm (49") w/ ROPS folded down<br>182.9cm (72") w/ ROPS up     | 124.5cm (49") w/ ROPS folded down<br>182.9cm (72") w/ ROPS up     | 124.5cm (49") w/ ROPS folded down<br>182.9cm (72") w/ ROPS up     | 124.5cm (49") w/ ROPS folded down<br>182.9cm (72") w/ ROPS up     | 124.5cm (49") w/ ROPS folded down<br>182.9cm (72") w/ ROPS up     |
| WARRANTY (MACHINE)*                                    | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          |
| WARRANTY (BATTERY)*                                    | 3 Year  |
| WARRANTY (DECK SHELL & FRAME)*                         | Limited lifetime  |
| ATTACHMENTS & ACCESSORIES                              | See page 56 / 57  |   |   |   |   |   |

|  | ARROW E 48  | ARROW E 48R   | ARROW E 52  | ARROW E 52R   |
|--|---|---|---|---|
| MODEL #  | 998301  | 998304  | 998302  | 998305  |
| BATTERY TYPE   | 56V FusionCore Lithium Ion Swappable                              |
| BATTERY CAPACITY                                       | 4x 4 kWh  | 4x 4 kWh  | 4x 4 kWh  | 4x 4 kWh  |
| BATTERY NUMBER   | 4 interchangeable   | 4 interchangeable   | 4 interchangeable   | 4 interchangeable   |
| CHARGE TIME  | 5.3 - 12 hours (depending on charger)                             |
| DRIVE SYSTEM   | Proprietary Electric Transaxle                                    | Proprietary Electric Transaxle                                    | Proprietary Electric Transaxle                                    | Proprietary Electric Transaxle                                    |
| MAX SPEED FWD/REV (APPROX)                             | 17.7km/h / 8.8km/h (11mph / 5.5mph)                               |
| DECK TYPE  | Side discharge  | Rear discharge  | Side discharge  | Rear discharge  |
| MULCH KIT  | Optional  | —   | Optional  | —   |
| DECK MATERIAL  | 4.5 mm sheet steel  |
| DECK CONSTRUCTION                                      | Fabricated  | Fabricated  | Fabricated  | Fabricated  |
| SPINDLES   | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. | FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max. |
| SPINDLE BEARINGS                                       | Serviceable Bottom Bearing  | Serviceable Bottom Bearing  | Serviceable Bottom Bearing  | Serviceable Bottom Bearing  |
| DECK LIFT SYSTEM                                       | Foot pedal and hand lever   |
| CUTTING WIDTH  | 122cm (48")   | 122cm (48")   | 132cm (52")   | 132cm (52")   |
| CUTTING HEIGHTS  | 3.8cm (1.5") – 12.7cm (5")  |
| CUTTING POSITIONS                                      | 15  | 15  | 15  | 15  |
| FRONT AXLE   | Fixed, greasable caster fork tubes                                |
| WHEELS (FRONT)   | Smooth 13 x 6.5-6 semi-pneumatic                                  |
| WHEELS (BACK)  | 20 X 10.5-8 Turf  |
| LED INTERFACE W/ HOUR COUNTER & 2 USB CHARGING SOCKETS | Standard  | Standard  | Standard  | Standard  |
| WEIGHT   | 546kg (1,204lbs)  | 545kg (1,203lbs)  | 562kg (1,240lbs)  | 561kg (1,236lbs)  |
| LENGTH   | 189.2cm (74.5")   | 189.2cm (74.5")   | 189.2cm (74.5")   | 189.2cm (74.5")   |
| WIDTH  | 127cm (50") w/o chute<br>157cm (62") w/ chute                     | 127cm (50")   | 142cm (56") w/o chute<br>170cm (67") w/ chute                     | 137cm (54")   |
| HEIGHT   | 116.8cm (46")   | 116.8cm (46")   | 116.8cm (46")   | 116.8cm (46")   |
| WARRANTY (MACHINE)*                                    | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          | 5 year / 1,500 hour<br>(no hour limit for first 2 years)          |
| WARRANTY (BATTERY)*                                    | 3 Year  | 3 Year  | 3 Year  | 3 Year  |
| WARRANTY (DECK SHELL & FRAME)*                         | Limited lifetime  | Limited lifetime  | Limited lifetime  | Limited lifetime  |
| ATTACHMENTS & ACCESSORIES                              | See page 56 / 57  |   |   |   |

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

\*\* Please refer to the applicable operating instructions for definitive technical specifications and values.

# SPECIFICATIONS\*\*

|                                      | SUMMIT PRO 348  | SUMMIT PRO 352  | SUMMIT PRO 360  | SUMMIT PRO 560   | SUMMIT PRO 572   | ZENITH 52   | ZENITH 52R  | ZENITH 60   | ZENITH 60R  |
|--------------------------------------|---|---|---|--|--|---|---|---|---|
| MODEL #                              | 992331  | 992333  | 992332  | 992334   | 992335   | 991320  | 991321  | 991322  | 991323  |
| ENGINE                               | Kawasaki FX801V   | Kawasaki FX801V   | Kawasaki FX801V   | Kawasaki FX850V  | Kawasaki FX850V  | Kawasaki® FX730V  | Kawasaki® FX730V  | Kawasaki® FX730V  | Kawasaki® FX730V  |
| DISPLACEMENT                         | 852 cm <sup>3</sup>   | 852 cm <sup>3</sup>   | 852 cm <sup>3</sup>   | 852 cm <sup>3</sup>  | 852 cm <sup>3</sup>  | 726cc   | 726cc   | 726cc   | 726cc   |
| MAX. ENGINE POWER                    | 18,5 kW / 24,8 hp at 3,600 U./min.  | 18,5 kW / 24,8 hp at 3,600 U./min.  | 18,5 kW / 24,8 hp at 3,600 U./min.  | 19,6 kW / 26,3 hp at 3,600 U./min.   | 19,6 kW / 26,3 hp at 3,600 U./min.   | 16,6 kW / 22,2 hp at 3,600 U./min.  | 16,6 kW / 22,2 hp at 3,600 U./min.  | 16,6 kW / 22,2 hp at 3,600 U./min.  | 16,6 kW / 22,2 hp at 3,600 U./min.  |
| DRIVE SYSTEM                         | Parker® HTJ   | Parker® HTJ   | Parker® HTJ   | Parker® HTG Heavy Duty   | Parker® HTG Heavy Duty   | Hydro-Gear® ZT-3200 Transaxles  | Hydro-Gear® ZT-3200 Transaxles  | Hydro-Gear® ZT-3200 Transaxles  | Hydro-Gear® ZT-3200 Transaxles  |
| FUEL CAPACITY                        | 48 litres   | 48 litres   | 48 litres   | 48 litres  | 48 litres  | 19.3 litres   | 19.3 litres   | 19.3 litres   | 19.3 litres   |
| MAX GROUND SPEED (APPROX) (FWD/REV)  | 14.5 km/h<br>5.3 km/h   | 14.5 km/h<br>5.3 km/h   | 14.5 km/h<br>5.3 km/h   | 21.3 km/h<br>8.4 km/h  | 21.3 km/h<br>8.4 km/h  | 13.7km/h / 6.4km/h<br>(8.5mph / 4mph)                                       |
| DECK TYPE                            | ENVY-PRO Side discharge   | ENVY-PRO Side discharge   | ENVY-PRO Side discharge   | ENVY-PRO Side discharge  | ENVY-PRO Side discharge  | Side discharge  | Rear discharge  | Side discharge  | Rear discharge  |
| MULCHING KIT                         | Optional  | Optional  | Optional  | Optional   | Optional   | Optional  | –   | Optional  | –   |
| DECK MATERIAL                        | 4.6 mm,<br>12.5 mm<br>edge reinforcement   | 4.6 mm,<br>12.5 mm<br>edge reinforcement   | 3.6 mm sheet steel with<br>double thickness around<br>the spindles          | 3.6 mm sheet steel with<br>double thickness around<br>the spindles          | 3.6 mm sheet steel with<br>double thickness around<br>the spindles          | 3.6 mm sheet steel with<br>double thickness around<br>the spindles          |
| DECK CONSTRUCTION                    | Fabricated  | Fabricated  | Fabricated  | Fabricated   | Fabricated   | Fabricated  | Fabricated  | Fabricated  | Fabricated  |
| NUMBER OF SPINDLES                   | 3   | 3   | 3   | 3  | 3  | 3   | 3   | 3   | 3   |
| SPINDLE MATERIAL                     | PRO-SPINDLES,<br>Forged aluminium,<br>sealed, 2x2 bearings   | PRO-SPINDLES,<br>Forged aluminium,<br>sealed, 2x2 bearings   | Forged Aluminium,<br>sealed   | Forged Aluminium,<br>sealed   | Forged Aluminium,<br>sealed   | Forged Aluminium,<br>sealed   |
| BLADE DRIVE                          | V-belt, CBT   | V-belt, CBT   | V-belt, CBT   | V-belt, CBT  | V-belt, CBT  | V-belt, CBT   | V-belt, CBT   | V-belt, CBT   | V-belt, CBT   |
| DECK ENGAGEMENT                      | electric, with brake  | electric, with brake  | electric, with brake  | electric, with brake   | electric, with brake   | Electric Ogura® GT1.5   | Electric Ogura® GT1.5   | Electric Ogura® GT1.5   | Electric Ogura® GT1.5   |
| DECK LIFT SYSTEM                     | Foot operated, spring assisted   | Foot operated, spring assisted   | Foot operated, spring assisted  | Foot operated, spring assisted  | Foot operated, spring assisted  | Foot operated, spring assisted  |
| CUTTING WIDTH                        | 48" 122 cm  | 52" 132 cm  | 60" 152 cm  | 60" 152 cm   | 72" 183 cm   | 132cm (52")   | 132cm (52")   | 152cm (60")   | 152cm (60")   |
| CUTTING HEIGHTS                      | 2.5 (1") – 12.7 cm (5")   | 2.5 (1") – 12.7 cm (5")   | 2.5 (1") – 12.7 cm (5")   | 2.5 (1") – 14 cm (5.5")  | 2.5 (1") – 14 cm (5.5")  | 3.8cm (1.5") – 12.7cm (5")  |
| CUTTING POSITIONS                    | 18, via dial  | 18, via dial  | 18, via dial  | 18, via dial   | 18, via dial   | 15  | 15  | 15  | 15  |
| WHEELS FRONT AXLE                    | Caster fork   | Caster fork   | Caster fork   | Caster fork  | Caster fork  | Caster fork suspension  | Caster fork suspension  | Caster fork suspension  | Caster fork suspension  |
| WHEELS (FRONT)                       | (15" x 6-6") semi-pneumatic, puncture proof  | (15" x 6-6") semi-pneumatic, puncture proof  | 33cm x 16.5cm (13" x 6.5-6")  |
| WHEELS (BACK)                        | (24" x 12-12")  | (24" x 12-12")  | (24" x 12-12")  | (26" x 12-12")   | (26" x 12-12")   | 55.9cm x 30.5cm (22" x 12"-12")   |
| SEAT                                 | Full suspension high back seat with adjustable arm rests and lumbar support | Full suspension high back seat with adjustable arm rests and lumbar support | Full suspension high back seat with adjustable arm rests and lumbar support | Adjustable. Fully pneumatic suspension, electrically adjustable to driver's weight, vibration isolators, arm rest and lumbar support | Adjustable. Fully pneumatic suspension, electrically adjustable to driver's weight, vibration isolators, arm rest and lumbar support | Full suspension high back seat with adjustable arm rests and lumbar support | Full suspension high back seat with adjustable arm rests and lumbar support | Full suspension high back seat with adjustable arm rests and lumbar support | Full suspension high back seat with adjustable arm rests and lumbar support |
| ROPS (ROLLOVER PROTECTION STRUCTURE) | Standard, foldable  | Standard, foldable  | Standard, foldable  | Standard, foldable   | Standard, foldable   | Standard, foldable  | Standard, foldable  | Standard, foldable  | Standard, foldable  |
| HOUR METER                           | Standard  | Standard  | Standard  | Standard   | Standard   | Standard  | Standard  | Standard  | Standard  |
| WEIGHT                               | 618kg (1,363 lbs)   | 661kg (1,457 lbs)   | 675kg (1,488 lbs)   | 742kg (1,637 lbs)  | 792kg (1,747 lbs)  | 421 kg (928lbs)   | 411 kg (906 lbs)  | 429 kg (946 lbs)  | 422 kg (930 lbs)  |
| LENGTH                               | 211 cm (83")  | 211 cm (83")  | 211 cm (83")  | 214 cm (84")   | 219 cm (86")   | 206 cm (81")  | 206 cm (81")  | 206 cm (81")  | 206 cm (81")  |
| WIDTH                                | 160 cm (63") w/ chute,<br>130 cm with mulch kit                             | 170 cm (67") w/ chute,<br>140 cm with mulch kit                             | 191 cm (75") w/ chute,<br>160 cm with mulch kit                             | 191 cm (75") w/ chute,<br>160 cm with mulch kit  | 221 cm (87") w/ chute,<br>191 cm with mulch kit  | 171 cm (67") w/ chute   | 137 cm (54")  | 190 cm (75") w/ chute   | 157 cm (62")  |
| HEIGHT                               | 122 cm (48")<br>ROPS folded down,<br>193 cm (76") ROPS up                   | 122 cm (48")<br>ROPS folded down,<br>193 cm (76") ROPS up                   | 122 cm (48")<br>ROPS folded down,<br>193 cm (76") ROPS up                   | 125 cm (49")<br>ROPS folded down,<br>196 cm (77")ROPS up   | 125 cm (49")<br>ROPS folded down,<br>196 cm (77")ROPS up   | 124.5cm (49")<br>ROPS folded down<br>182.9cm (72")ROPS up                   | 124.5cm (49")<br>ROPS folded down<br>182.9cm (72")ROPS up                   | 124.5cm (49")<br>ROPS folded down<br>182.9cm (72")ROPS up                   | 124.5cm (49")<br>ROPS folded down<br>182.9cm (72")ROPS up                   |
| WARRANTY (MACHINE)*                  | 5 Year / 1.250 Hour   | 5 Year / 1.250 Hour   | 5 Year / 1.250Hour  | 5 Year / 1.500 Hour  | 5 Year / 1.500 Hour  | 4 Year / 750 Hour   | 4 Year / 750 Hour   | 4 Year / 750 Hour   | 4 Year / 750 Hour   |
| ATTACHMENTS & ACCESSORIES            | See page 56 / 57  |   |   |  |  |   |   |   |   |

See page 56 / 57

|  | ARROW 32  | ARROW 36  |
|--|---|---|
| MODEL #                                  | 994302  | 994303  |
| ENGINE                                   | Kawasaki® FS 600 V-Twin                           | Kawasaki® FS 600 V-Twin                           |
| DISPLACEMENT                             | 603cc   | 603cc   |
| DRIVE SYSTEM                             | Hydro-Gear® ZT-3100 Transaxle                     | Hydro-Gear® ZT-3100 Transaxle                     |
| FUEL CAPACITY                            | 22.7 litres                                       | 22.7 litres                                       |
| MAX GROUND SPEED (APPROXIMATE) (FWD/REV) | 12.8km/h / 4.8km/h (8mph / 3mph)                  | 12.8km/h / 4.8km/h (8mph / 3mph)                  |
| STARTER                                  | Electric  | Electric  |
| DECK MATERIAL                            | 4.5 mm sheet steel                                | 4.5 mm sheet steel                                |
| DECK CONSTRUCTION                        | Welded  | Welded  |
| NUMBER OF SPINDLES                       | 2   | 2   |
| SPINDLE HOUSING                          | Forged Aluminium                                  | Forged Aluminium                                  |
| DECK DRIVE                               | Belt  | Belt  |
| DECK ENGAGEMENT                          | Electric Clutch                                   | Electric Clutch                                   |
| DECK LIFT SYSTEM                         | Foot pedal and hand lever                         | Foot pedal and hand lever                         |
| CUTTING WIDTH                            | 81cm (32")  | 91cm (36")  |
| CUTTING HEIGHTS                          | 3.8cm - 12.7cm (1.5" - 5.0")                      | 3.8cm - 12.7cm (1.5" - 5.0")                      |
| CUTTING POSITIONS                        | 15  | 15  |
| WHEELS (FRONT)                           | 11 x 4.00-5 semi-pneumatic                        | 11 x 4.00-5 semi-pneumatic                        |
| WHEELS (BACK)                            | 18 x 6.50 - 8 radial                              | 18 x 8.50 - 8 radial                              |
| WEIGHT                                   | 351kg (774lbs)                                    | 357kg (787lbs)                                    |
| LENGTH                                   | 160cm (63")                                       | 160cm (63")                                       |
| WIDTH                                    | 85.1cm (33.5")                                    | 92.7cm (36.5")                                    |
| HEIGHT                                   | 121.9cm (48")                                     | 121.9cm (48")                                     |
| WARRANTY (MACHINE)*                      | 5 Year / 1000 Hour<br>No hour limit first 2 years | 5 Year / 1000 Hour<br>No hour limit first 2 years |
| WARRANTY (DECK SHELL & FRAME)*           | Limited lifetime                                  | Limited lifetime                                  |
| ATTACHMENTS & ACCESSORIES                | See page 56 / 57                                  |   |

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

\*\* Please refer to the applicable operating instructions for definitive technical specifications and values.

# SPECIFICATIONS\*\*

|  | <b>APEX 48</b>  | <b>APEX 48R</b>   | <b>APEX 52</b>  | <b>APEX 52R</b>   |
|--|---|---|---|---|
| <b>MODEL #</b>                             | 991324  | 991325  | 991326  | 991327  |
| <b>ENGINE</b>                              | Kawasaki® FR691 V-Twin  | Kawasaki® FR691 V-Twin  | Kawasaki® FR691 V-Twin  | Kawasaki® FR691 V-Twin  |
| <b>DISPLACEMENT</b>                        | 726cc   | 726cc   | 726cc   | 726cc   |
| <b>DRIVE SYSTEM</b>                        | Hydro-Gear® ZT-3100 Transaxles                                    | Hydro-Gear® ZT-3100 Transaxles                                    | Hydro-Gear® ZT-3100 Transaxles                                    | Hydro-Gear® ZT-3100 Transaxles                                    |
| <b>FUEL CAPACITY</b>                       | 19.3 litres   | 19.3 litres   | 19.3 litres   | 19.3 litres   |
| <b>MAX GROUND SPEED (APPROX) (FWD/REV)</b> | 12.9km/h / 6.4km/h (8mph / 4mph)                                  |
| <b>DECK TYPE</b>                           | Side discharge  | Rear discharge  | Side discharge  | Rear discharge  |
| <b>DECK MATERIAL</b>                       | 3.6 mm sheet steel with double thickness around the blade carrier | 3.6 mm sheet steel with double thickness around the blade carrier | 3.6 mm sheet steel with double thickness around the blade carrier | 3.6 mm sheet steel with double thickness around the blade carrier |
| <b>DECK CONSTRUCTION</b>                   | Fabricated  | Fabricated  | Fabricated  | Fabricated  |
| <b>NUMBER OF SPINDLES</b>                  | 3   | 3   | 3   | 3   |
| <b>SPINDLE MATERIAL</b>                    | Forged Aluminium  | Forged Aluminium  | Forged Aluminium  | Forged Aluminium  |
| <b>SPINDLE SHAFT</b>                       | Steel, StressProof®   | Steel, StressProof®   | Steel, StressProof®   | Steel, StressProof®   |
| <b>DECK ENGAGEMENT</b>                     | Electric Ogura  | Electric Ogura  | Electric Ogura  | Electric Ogura  |
| <b>DECK LIFT SYSTEM</b>                    | Foot Operated   | Foot Operated   | Foot Operated   | Foot Operated   |
| <b>CUTTING WIDTH</b>                       | 122cm (48")   | 122cm (48")   | 132cm (52")   | 132cm (52")   |
| <b>CUTTING HEIGHTS</b>                     | 3.8cm (1.5") - 12.7cm (5")  |
| <b>CUTTING POSITIONS</b>                   | 15  | 15  | 15  | 15  |
| <b>WHEELS (FRONT)</b>                      | 33cm x 16.5cm (13" x 6.5-6")                                      |
| <b>WHEELS (BACK)</b>                       | 55.9cm x 24.1-30.5cm (22" x 9.5-12")                              |
| <b>SEAT</b>                                | High Back Premium w/ Padded Armrests                              |
| <b>HOUR METER</b>                          | Standard  | Standard  | Standard  | Standard  |
| <b>WEIGHT</b>                              | 374.2kg (825lbs)  | 371.2kg (818lbs)  | 395kg (871lbs)  | 388.9kg (857lbs)  |
| <b>LENGTH</b>                              | 200.6cm (79")   | 200.6cm (79")   | 200.6cm (79")   | 200.6cm (79")   |
| <b>WIDTH</b>                               | 160cm (63")   | 124cm (49")   | 170cm (67")   | 137cm (54")   |
| <b>HEIGHT</b>                              | 119.3cm (47")   | 119.3cm (47")   | 119.3cm (47")   | 119.3cm (47")   |
| <b>WARRANTY (MACHINE)*</b>                 | 4 Year / 500 Hour   |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>       | See page 56 / 57  |   |   |   |

|  | <b>IKON 42</b>  | <b>IKON 52</b>  | <b>EDGE 34</b>  | <b>EDGE 42</b>  |
|--|---|---|---|---|
| <b>MODEL #</b>                             | 918300  | 918301  | 915338  | 915339  |
| <b>ENGINE</b>                              | Kawasaki® FR651   | Kawasaki® FR691   | Ariens  | Ariens  |
| <b>DISPLACEMENT</b>                        | 726cc   | 726cc   | 635cc   | 635cc   |
| <b>DRIVE SYSTEM</b>                        | Hydro-Gear® EZT 2200 Transaxles                               | Hydro-Gear® EZT 2200 Transaxles                               | Hydro-Gear® EZT Transaxles                                    | Hydro-Gear® EZT Transaxles                                    |
| <b>FUEL CAPACITY</b>                       | 13.2 litres   | 13.2 litres   | 7.5 litres  | 7.5 litres  |
| <b>MAX GROUND SPEED (APPROX) (FWD/REV)</b> | 11.3km/h / 4.8km/h (7mph / 3mph)                              | 11.3km/h / 4.8km/h (7mph / 3mph)                              | 9.6km/h / 4.8km/h (6mph / 3mph)                               | 9.6km/h / 4.8km/h (6mph / 3mph)                               |
| <b>DECK TYPE</b>                           | Side discharge  | Side discharge  | Side discharge  | Side discharge  |
| <b>DECK MATERIAL</b>                       | 2.9 mm sheet steel with double thickness around blade carrier | 2.9 mm sheet steel with double thickness around blade carrier | 2.9 mm sheet steel with double thickness around blade carrier | 2.9 mm sheet steel with double thickness around blade carrier |
| <b>DECK CONSTRUCTION</b>                   | Fabricated  | Fabricated  | Stamped   | Fabricated  |
| <b>NUMBER OF SPINDLES</b>                  | 3   | 3   | 2   | 2   |
| <b>SPINDLE SHAFT</b>                       | Forged aluminium  | Forged aluminium  | Steel   | Steel   |
| <b>DECK ENGAGEMENT</b>                     | Electric Warner   | Electric Warner   | Electric Warner   | Electric Warner   |
| <b>DECK LIFT SYSTEM</b>                    | Foot Operated   | Foot Operated   | Foot Operated   | Foot Operated   |
| <b>CUTTING WIDTH</b>                       | 107cm (42")   | 132cm (52")   | 86cm (34")  | 107cm (42")   |
| <b>CUTTING HEIGHTS</b>                     | 3.8-11.4cm (1.5"-4.5")  | 3.8-11.4cm (1.5"-4.5")  | 3.8-11.4cm (1.5"-4.5")  | 3.8-11.4cm (1.5"-4.5")  |
| <b>CUTTING POSITIONS</b>                   | 13  | 13  | 7   | 7   |
| <b>WHEELS (FRONT)</b>                      | 11" x 6-5"  | 11" x 6-5"  | 27.9cm x 10.2cm (11" x 4")                                    | 27.9cm x 10.2cm (11" x 4")                                    |
| <b>WHEELS (BACK)</b>                       | 50.8cm x 20.3-20.3cm (20" x 8-8")                             | 50.8cm x 25.4-20.3cm (20" x 10-8")                            | 45.7cm x 16.5-20.3cm (18" x 6.5-8")                           | 45.7cm x 16.5-20.3cm (20" x 8-8")                             |
| <b>SEAT</b>                                | High Back w/ Armrests   | High Back w/ Armrests   | High Back w/ Seat Springs                                     | High Back w/ Seat Springs                                     |
| <b>HOUR METER</b>                          | Standard  | Standard  | Standard  | Standard  |
| <b>WEIGHT</b>                              | 297kg (655lbs)  | 310kg (683lbs)  | 202.7kg (447lbs)  | 231.3kg (510lbs)  |
| <b>LENGTH</b>                              | 190cm (75")   | 190cm (75")   | 172.7cm (68")   | 172.7cm (68")   |
| <b>WIDTH</b>                               | 142cm (56")   | 168cm (66")   | 113.8cm (44.8")   | 139.2cm (54.8")   |
| <b>HEIGHT</b>                              | 117cm (46")   | 117cm (46")   | 99.8cm (39.3")  | 102.9cm (40.5")   |
| <b>WARRANTY (MACHINE)*</b>                 | 3 Year / 300 Hours  | 3 Year / 300 Hours  | 2 Year / 150 Hours  | 2 Year / 150 Hour   |
| <b>ATTACHMENTS &amp; ACCESSORIES</b>       | See page 56 / 57  |   |   |   |

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

\*\* Please refer to the applicable operating instructions for definitive technical specifications and values.

# TO FIND YOUR NEAREST ARIENS DEALER VISIT ARIENS.EU

Authorised Ariens dealers are an essential part of the purchasing experience and on-going aftercare of our products. Be assured that as garden machinery specialists with first class product training, our dealers are experts in finding the right Ariens model to suit your requirements. They have the ability to demonstrate first hand the many benefits of owning an Ariens.

Only through our specialist dealers will you receive entitlements such as warranties, product inspections and safety checks on delivery – and have total confidence in the training and advice you will receive. Furthermore, they will carry out the necessary servicing and provide ongoing maintenance advice if required.



Visit us online: [www.ariens.eu](http://www.ariens.eu)

For product information, customer reviews, product videos,  
dealer locator and customer support



AriensCo GmbH  
Ellwanger Straße 15  
74424 Buehlertann  
Germany

+49 (0)7973/9123-0  
info-eu@ariensco.com  
www.ariens.eu

© COPYRIGHT 10/2025

Subject to changes and errors. No claims  
can be derived from information or  
illustrations.

® Registered trademark and trademark of  
Ariens Company.

Kawasaki®, Hydro-Gear®, Michelin Tweels®  
and Parker® are registered trademarks of  
their respective companies.



ARIENS | CO

ARIENS®

W11000109